




Relays & Contactors > Electromechanical Relays > Force Guided Relay with 4 high insulated contacts

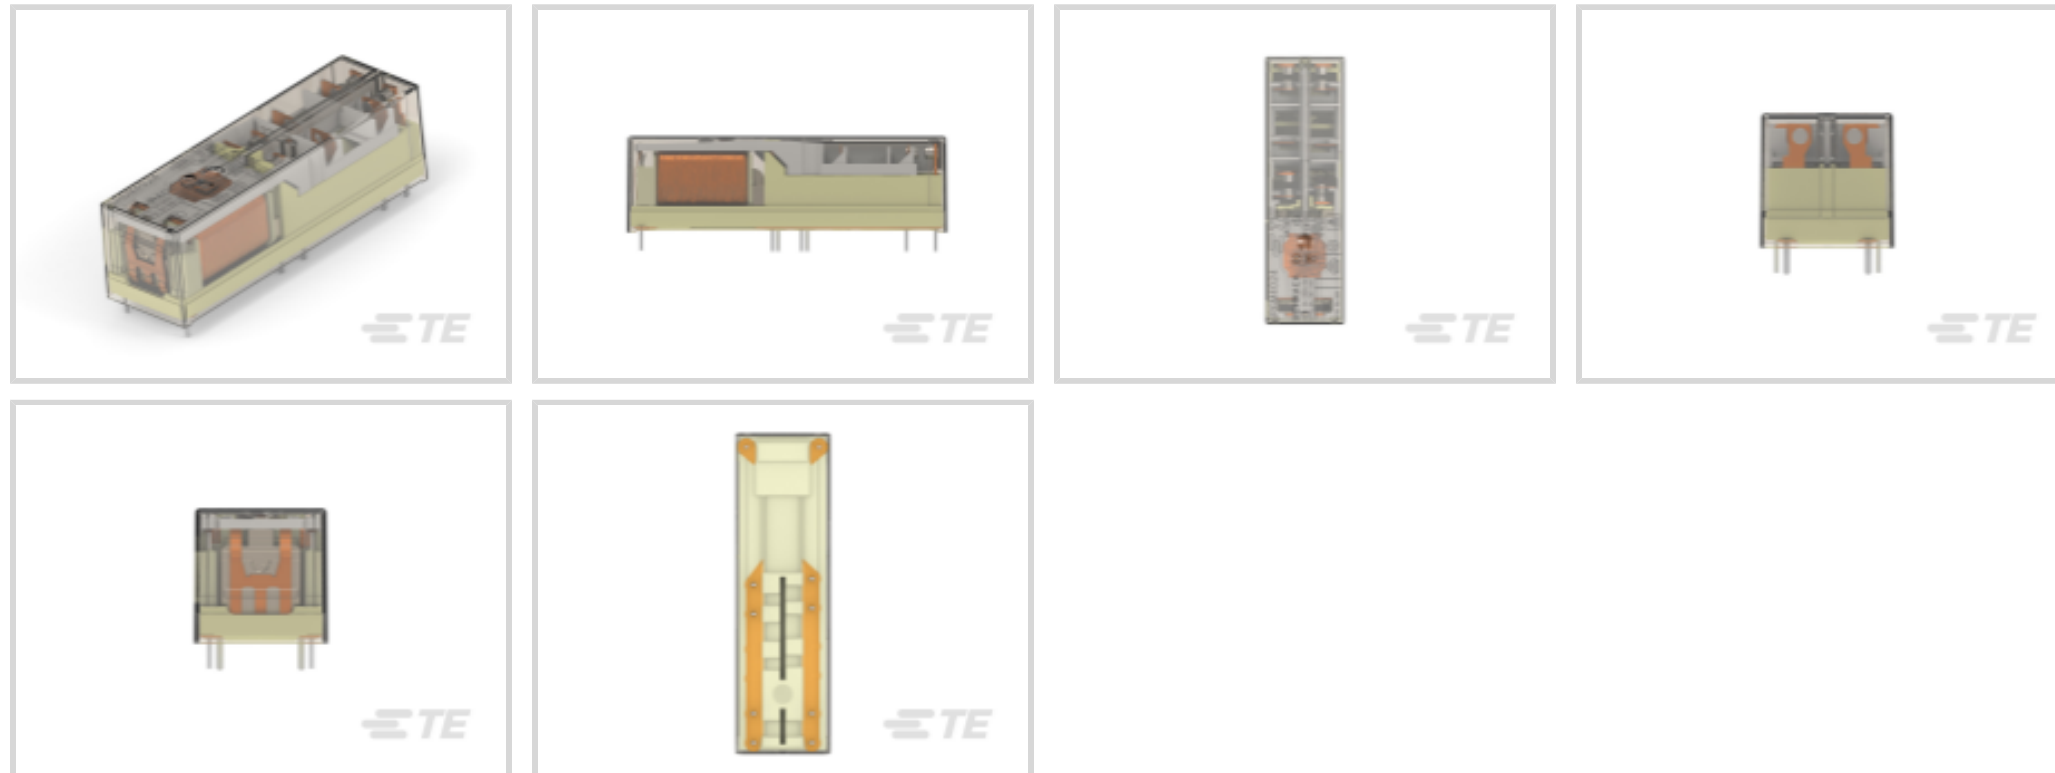

Relay & Contactor Type: **Force-Guided Relay**

Contact Arrangement: **3A (NO) + 1B (NC)**

Contact Current Rating: **8 A**

Coil Voltage Rating: **24 VDC**

Contact Voltage Rating: **250 VAC**

[All Force Guided Relay with 4 high insulated contacts \(9\)](#)

Features

Contact Features

Contact Material	AgSnO2
------------------	--------

Dimensions

Insulation Clearance Between Contact & Coil	5.5 mm[.217 in]
Insulation Creepage Between Contact & Coil	5.5 mm[.217 in]
Product Width	16.5 mm[.649 in]
Product Length	55 mm[2.16 in]
Product Height	16.5 mm[.649 in]

Product Availability

Product Availability	Worldwide
----------------------	-----------

Packaging Features

Packaging Method	Box & Tube
------------------	------------

Other



Coil Power Rating Class	1 – 1.5 W
Contact Current Class	5 – 10 A
Height Class (Mechanical)	15 – 20 mm
Length Class (Mechanical)	50 – 60 mm
Width Class (Mechanical)	16 – 20 mm
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Usage Conditions

Operating Temperature Range	-25 – 70 °C[-13 – 158 °F]
Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	70 °C[158 °F]

Body Features

Product Weight	30 g[1.058 oz]
Enclosure Type	Flux Resistant Automatic Soldering & Washable

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1500 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	3000 Vrms
Contact Switching Voltage (Max)	400 VAC
Contact Switching Load (Min)	10mA @ 5V
Coil Resistance	480 Ω
Contact Current Rating	8 A
Coil Voltage Rating	24 VDC
Contact Voltage Rating	250 VAC
Coil Power Rating DC	1.2 W
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms

Configuration Features

Contact Number of Poles	4
Contact Arrangement	3A (NO) + 1B (NC)

Product Type Features

Relay & Contactor Type	Force-Guided Relay
------------------------	--------------------

Termination Features

--	--



Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | SCHRACK SR6



AC Relays(7)



DC Relays(16)




Electromechanical Relays(95)



Force Guided Relays(95)

Customers Also Bought

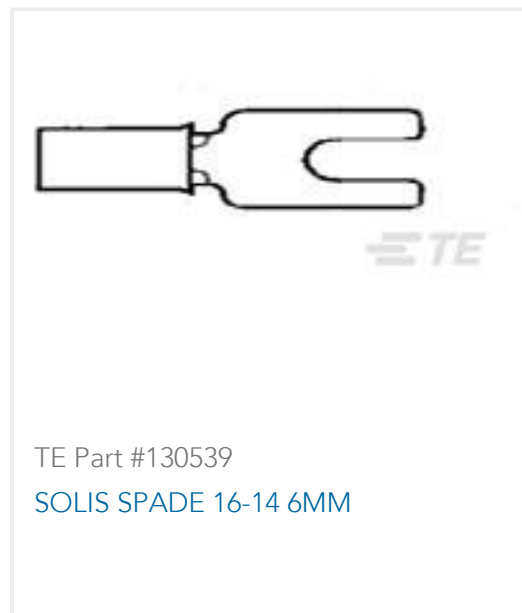

TE Part #130539
SOLIS SPADE 16-14 6MM



TE Part #2-2176347-1
CRGCO 2010 470R 1%



TE Part #3-1393239-5
RT134730



TE Part #3-794680-8
08P MICRO MNL ASSY,VRT,THRU LF



TE Part #4-794636-6
16P MICRO MNL ASSY,VRT,SMT,LF



TE Part #2-1393243-1
RTE25024



TE Part #1462037-1
IM01GR=IM RELAY 140mW 3V



TE Part #4-794636-4
14P MICRO MNL ASSY,VRT,SMT,LF



TE Part #171892-1
9CIR MIC PLUG HSG



TE Part #172096-1
MIC CAP 9P W-W W/F

Documents

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_3-1415353-1_G.2d_dxf.zip](#)

[English](#)

[Customer View Model](#)



[ENG_CVM_CVM_3-1415353-1_G.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-1415353-1_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Safety Relay SR6 D/M](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English