

336236-1 ✓ ACTIVE

FASTON | FASTON 250

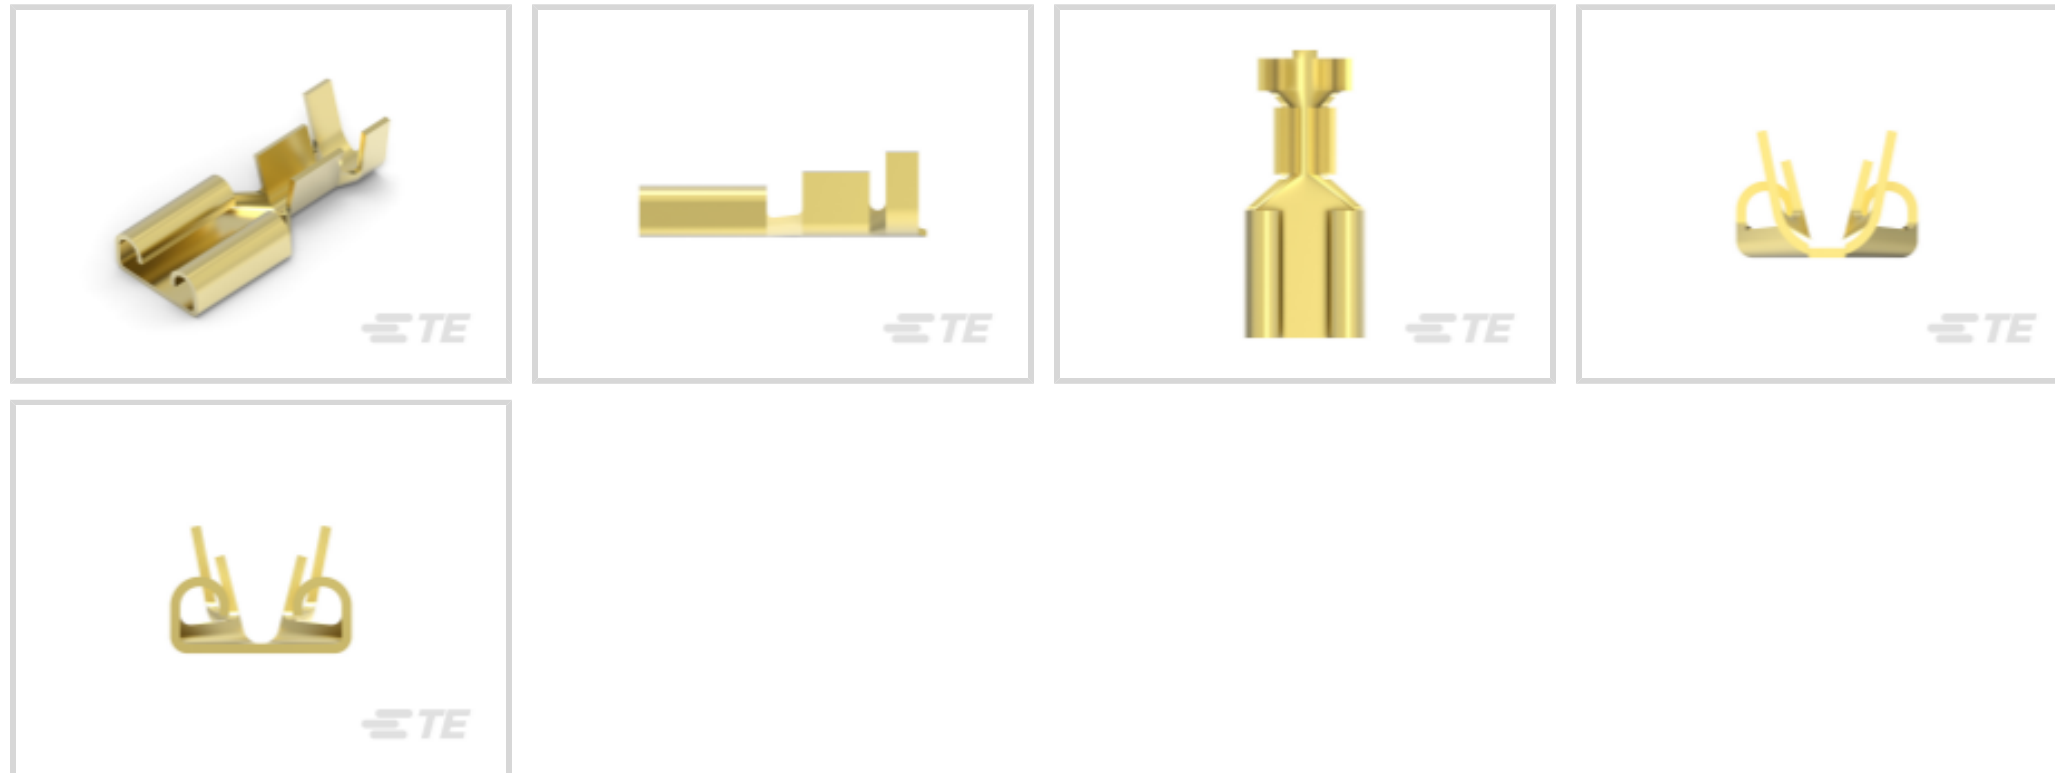
TE Internal #: 336236-1

Quick Disconnect Receptacle, 17 – 13 AWG, 1.03 – 2.62 mm² Wire, 6.35 mm [.25 in] Tab Width, Straight, Brass, Unplated Plating, Strip /Reel, FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: 1.03 – 2.62 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Connection Capacity	Single
---------------------	--------

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Electrical Characteristics

Voltage Rating	240 V
----------------	-------

Packaging Features

Packaging Quantity	7000
--------------------	------

Packaging Method	Strip/Reel
------------------	------------

Dimensions

Product Length	17.1 mm [.673 in]
----------------	-------------------

Compatible Insulation Diameter Range	3 – 4.3 mm [.118 – .169 in]
--------------------------------------	-----------------------------



Terminal Material Thickness	.79 mm[.031 in]
Wire Size	1.03 – 2.62 mm ²

Product Type Features

Insertion Force	Normal
-----------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



KIT
REPRESENTATION ONLY

TE Part # 7-2150004-7
OCEAN_2.0_SPARE_PART_KIT-110F180F



TE Part # 336235-3
250 FASTON, REC., 24-17 AWG, PTBR



TE Part # 336235-1
250 FASTON, REC., 24-17 AWG, BR




TE Part # 2150004-2
OCEAN_2.0_Applicator-E-110F180F-REA

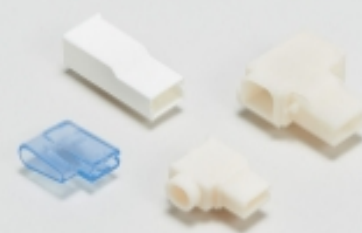


TE Part # 2150004-1
OCEAN_2.0_Applicator-E-110F180F-REM


Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(118)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)



PCB Terminals(133)

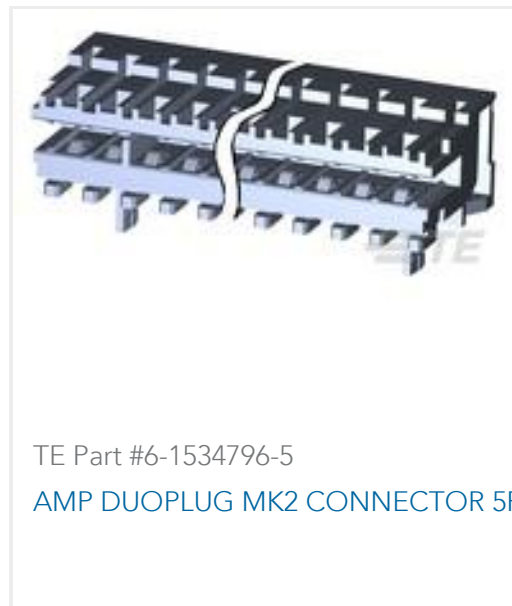
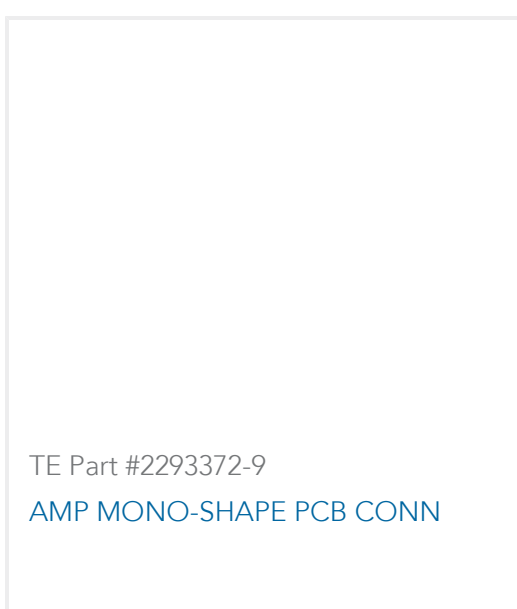
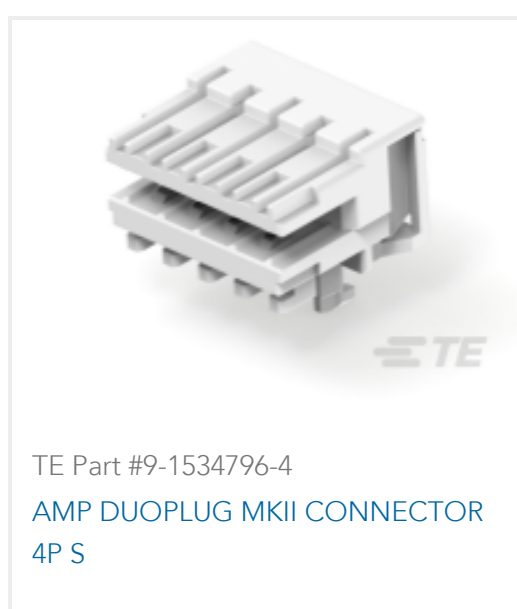


Quick Disconnects(425)



Splices(4)

Customers Also Bought

TE Part #2-2306287-5
5P DUOPLUG MARK II SIDE
LOCKING, SELTE Part #4-2293382-4
AMP MONO-SHAPE TAB CONN 4P
GW-V0TE Part #6-1534796-5
AMP DUOPLUG MK2 CONNECTOR 5PTE Part #3-2306287-7
7P DUOPLUG MARK II SIDE
LOCKING, SELTE Part #5-2306286-5
5P DUOPLUG MARK II SIDE
LOCKING, FULTE Part #5-160433-1
187 FASTON REC 20-16 AWG BRTE Part #8-1534415-3
DUOPL POW FEM CON3PTE Part #293036-1
RAST2.5 W2W IDC-IDC 5pos Panel
MntTE Part #2293372-9
AMP MONO-SHAPE PCB CONNTE Part #9-1534796-4
AMP DUOPLUG MKII CONNECTOR
4P S

Documents

Product Drawings

[250 FASTON,REC.,17-14 AWG,BR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_336236-1_N.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_336236-1_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_336236-1_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

EBGeneral Application Specification for Open Barrel Terminals**

English

[Application Specification](#)

English

Agency Approvals

Agency Approval Document

English