


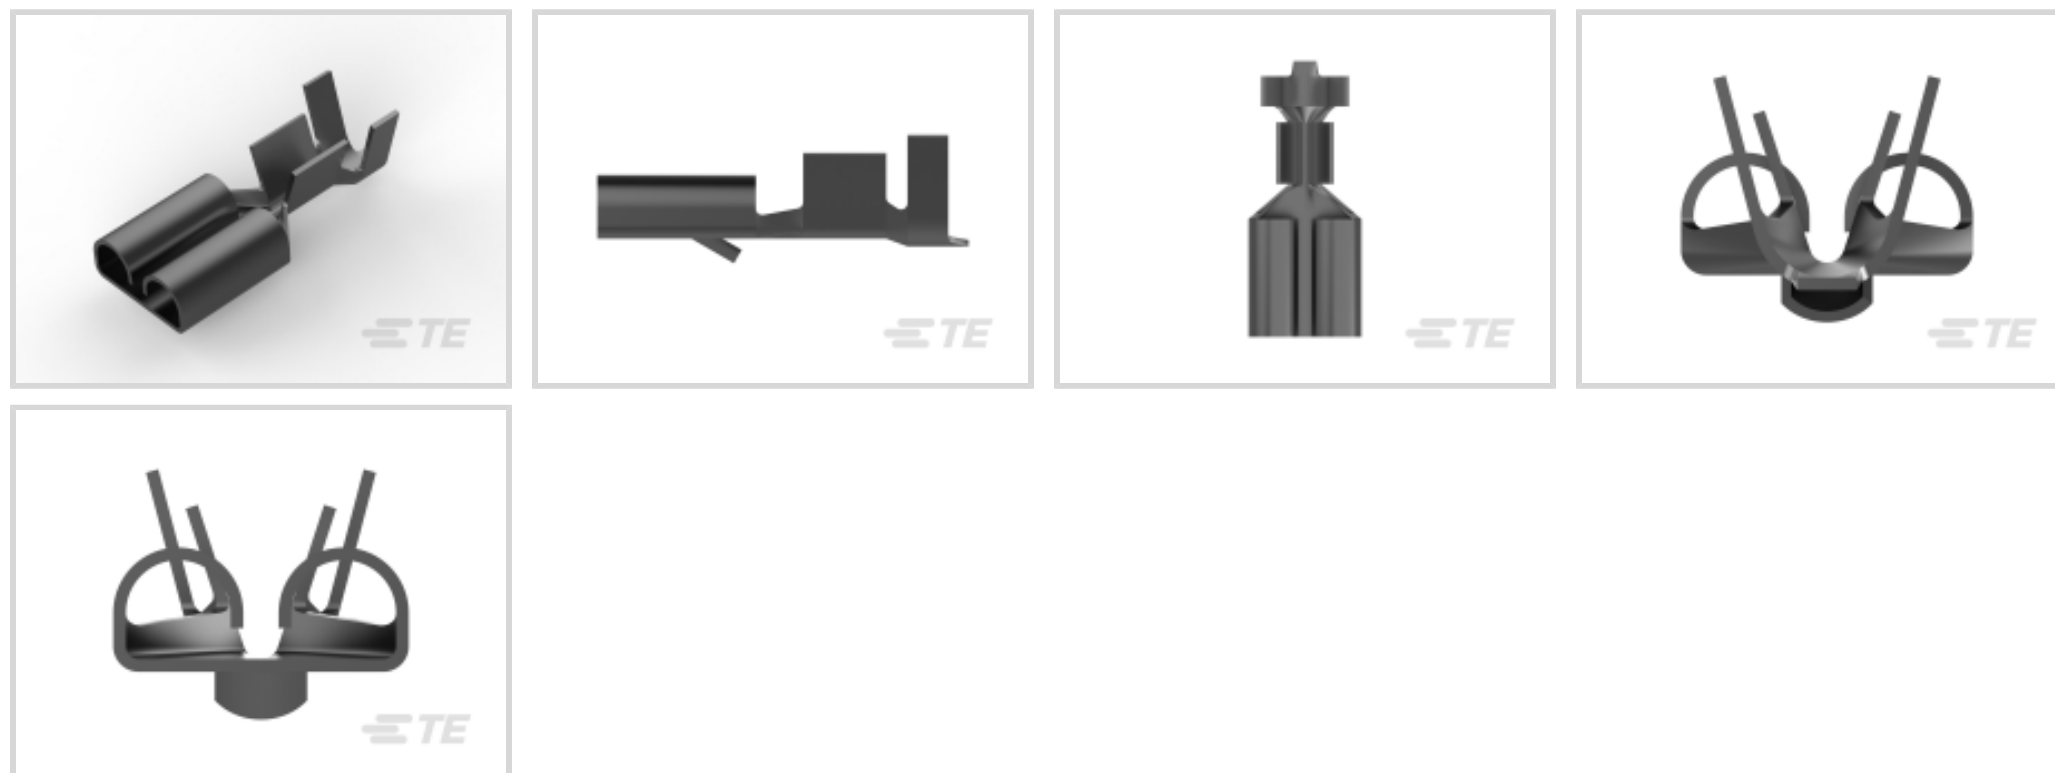

Terminals &amp; Splices &gt; Quick Disconnects

Quick Disconnect Terminal Type: **Receptacle**Wire Size: 1.03 – 2.62 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

## Features

### Configuration Features

Compatible With Wire &amp; Cable Type

Discrete Wire

### Termination Features

Product Terminates To

Wire &amp; Cable

### Mechanical Attachment

Locking Lance Height

1.2 mm

Wire Insulation Support

With

Mating Retention Type

Locking Lance

### Packaging Features

Packaging Quantity

8000

Packaging Method

Reel

### Dimensions

Product Length

17.1 mm [.673 in]

Compatible Insulation Diameter Range

3 – 4 mm [.118 – .157 in]

Terminal Material Thickness

.32 mm [.013 in]



Wire Size	1.03 – 2.62 mm <sup>2</sup>
-----------	-----------------------------

### Product Type Features

Insertion Force	Normal
-----------------	--------

### Contact Features

Quick Disconnect Terminal Type	Receptacle
--------------------------------	------------

Mating Tab Width	6.35 mm [.25 in]
------------------	------------------

Mating Tab Thickness	.81 mm [.032 in]
----------------------	------------------

Terminal Orientation	Straight
----------------------	----------

Contact Base Material	Brass
-----------------------	-------

Terminal Plating Material	Tin
---------------------------	-----

Crimp Type	F-Crimp
------------	---------

Barrel Type	Open
-------------	------

### Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

### Other

EU RoHS Compliance	Compliant
--------------------	-----------

EU ELV Compliance	Compliant
-------------------	-----------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2150014-2  
OCEAN\_2.0\_Applicator-E-110F180F-REA



TE Part # 626096-2  
.250 S FASTIN ON



TE Part # 626094-2  
FF .250 REC 0.5 /1.0 MM2 0.32X19.3 TPBR




TE Part # 2150014-1  
OCEAN\_2.0\_Applicator-E-110F180F-REM



TE Part # 7-2150014-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-110F180F

## Also in the Series | FASTIN-FASTON 250

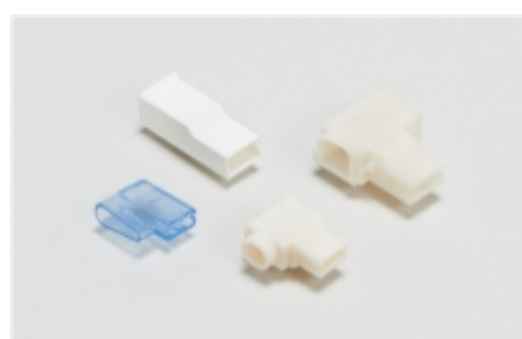

Crimp Terminal Housings(204)



Insertion & Extraction Tools(2)



PCB Terminals(1)



Quick Disconnects(225)

## Customers Also Bought



TE Part #DT04-12PA-CE04  
REC, 12P, GRY, E, XCAP, A



TE Part #DTF15-12PC  
HDR, 12P, GRN, ST, SN/NI/CU, C



TE Part #1989581-1  
SPECIAL MICRO TIMER REC.



TE Part #881779-1  
KIT ECONOSEAL J 6PO




TE Part #2822365-1  
EJ-2 DBL LOCK PLUG ASSY 2P (D)  
BLACK



TE Part #3-647106-3  
03P MTA-100 HDR ASSY,SM,SN



TE Part #CAT-J04-APHH  
AMPSEAL PCB Right-Angle Headers

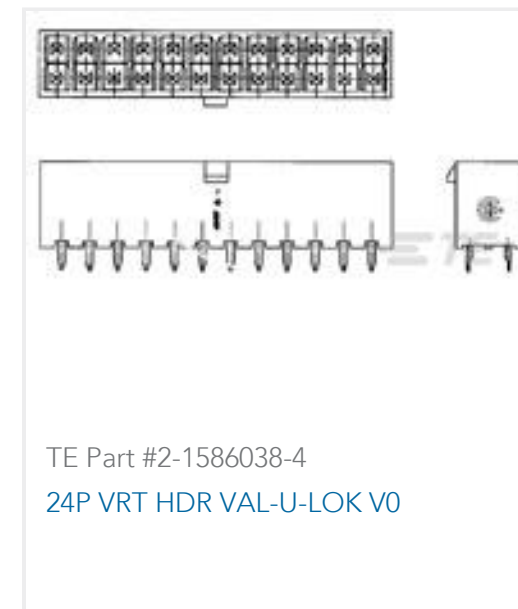

TE Part #2-1586038-4  
24P VRT HDR VAL-U-LOK V0



TE Part #DRC12-40PB  
REC, 40P, BLK, N, FLANGE, B

## Documents

### Product Drawings

[FASTIN-ON .250 REC 1.0-2.5 MM2 TPBR](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_626095-2\\_L1\\_c-626095-2-l1.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_626095-2\\_L1\\_c-626095-2-l1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_626095-2\\_L1\\_c-626095-2-l1.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Product Specifications



## Application Specification

German