



**Power Triple Lock**

TE Internal #: 7-2232357-4

Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock, Rectangular Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK Glow Wire Plug



Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Wire**

Number of Positions: **12**

Centerline (Pitch): **6 mm [.236 in]**

[All POWER TRIPLE LOCK Glow Wire Plug \(44\)](#)

**Features**

**Body Features**

Connector & Keying Code	C
Cable Exit Angle	180°

**Identification Marking**

Circuit Identification Feature	With
--------------------------------	------

**Contact Features**

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Receptacle

**Mechanical Attachment**

Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

**Industry Standards**



Compatible With Agency/Standards Products	UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)

### Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

### Configuration Features

Number of Positions	12
Number of Power Positions	12
Number of Rows	3

### Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

### Housing Features

Centerline (Pitch)	6 mm [.236 in]
Housing Color	Green
Housing Material	Nylon GF

### Dimensions

Row-to-Row Spacing	8.1 mm [.319 in]
--------------------	------------------

### Usage Conditions

Operating Temperature Range	-55 – 140 °C [-67 – 284 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Packaging Features

Packaging Method	Carton
------------------	--------



Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 7-2232356-4  
PTL 3X4 CAP PANEL MT GLW WIRE  
KEY C GRN



TE Part # CAT-P87074-R2435  
Receptacle Contact — POWER TRIPLE  
LOCK



TE Part # CAT-P87074-T669  
Locking Plate, POWER TRIPLE LOCK,  
TPA



TE Part # 1971789-1  
CPA

Also in the Series | [Power Triple Lock](#)



Connector Contacts(26)



Connector Hardware(12)



Insertion & Extraction Tools(1)




PCB Headers & Receptacles(21)



Power Contacts(26)




Rectangular Power Connectors(280)

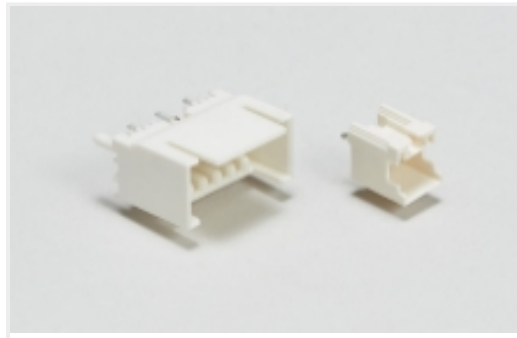

Wire-to-Board Headers & Receptacles (21)

## Customers Also Bought

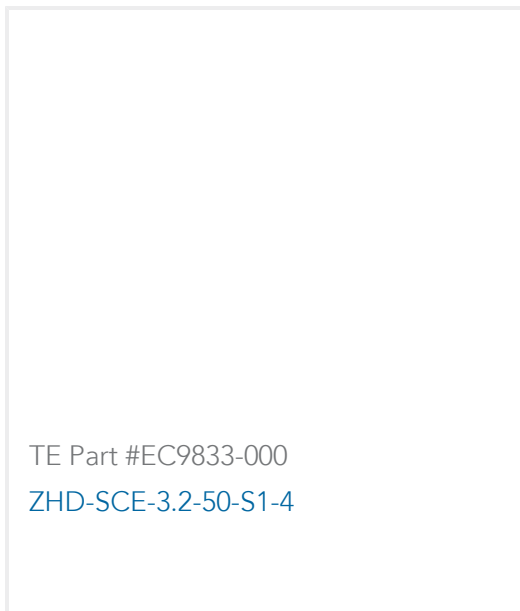

TE Part #EC9833-000  
ZHD-SCE-3.2-50-S1-4




TE Part #ASA158F12390235000  
623 PLUG



TE Part #1614770-4  
BDS 2 A 250 10R 10%



TE Part #1-1415543-5  
RTE44110

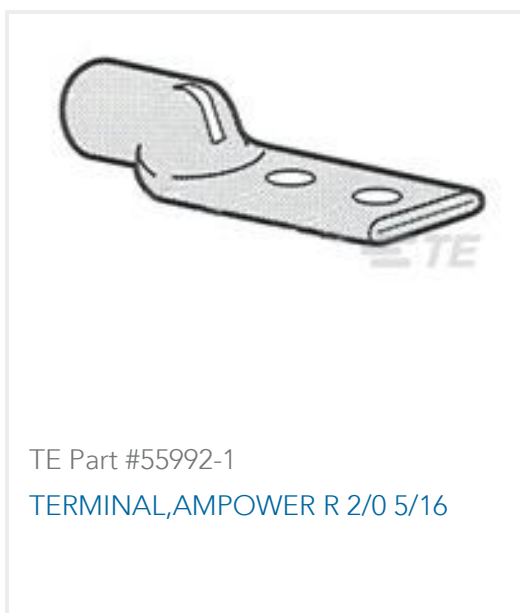

TE Part #55992-1  
TERMINAL,AMPOWER R 2/0 5/16



TE Part #ZPF000000000205373  
PLUG MALE ANG.90 CAL.20 - FXP



TE Part #ZPF000000000136485  
RECEPTACLE MALE FOR 12 PINS,  
CAL1,6



TE Part #ZPF000000000205388  
CONTACT FEMALE CAL.20, M12 - FXP



TE Part #ZPF000000000205378  
CONTACT MALE ANG.90, CAL20,  
120MM2 - FXP



TE Part #YZ-KC-212751A-PY00  
TOOL DISMOUNTING - FXP2

## Documents



### Product Drawings

[PTL 3X4 PLUG HSG GLW WIRE KEY C GRN](#)

English

---

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_7-2232357-4\\_B.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_7-2232357-4\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_7-2232357-4\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Product Specifications

[Application Specification](#)

English

---

### Agency Approvals

[VDE Certificate](#)

English