

# PT370T30 ✓ ACTIVE

SCHRACK | SCHRACK Miniature Relay PT


TE Internal #: 9-1415002-1

General Purpose Power Relay, AC, Monostable, 3 Form C 3PDT-CO, 10 A Contact Rating, 230 VAC Coil Voltage, SCHRACK Miniature Relay PT

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays

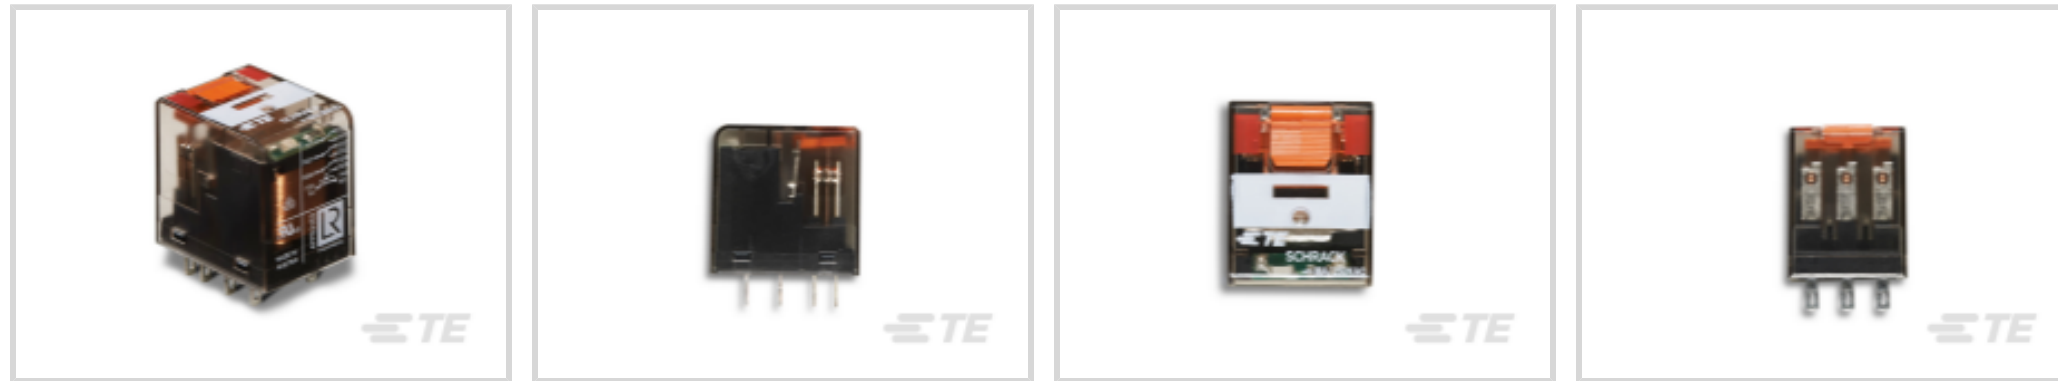

Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **AC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **3 Form C 3PDT-CO**

Contact Current Rating: **10 A**

## Features

### Contact Features

Contact Material	AgNi90/10
------------------	-----------

### Dimensions

Insulation Clearance Between Contact & Coil	3 mm
Insulation Creepage Between Contact & Coil	4 mm[.157 in]
Product Width	22.5 mm[.885 in]
Product Length	28 mm[1.1 in]
Product Height	29 mm[1.14 in]

### Packaging Features

Packaging Method	Carton & Tube
------------------	---------------

### Other

	.5 – 1 VA
Contact Current Class	5 – 10 A, 10 – 20 A
Height Class (Mechanical)	25 – 30 mm
Length Class (Mechanical)	25 – 30 mm
Width Class (Mechanical)	20 – 25 mm
EU RoHS Compliance	Compliant with Exemptions
EU ELV Compliance	Compliant

### Usage Conditions

Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
Environmental Category of Protection	RTII
Environmental Ambient Temperature (Max)	70 °C[158 °F]

### Body Features

Product Weight	30 g[1.058 oz]
Enclosure Type	Flux Resistant Automatic Soldering

### Electrical Characteristics

Contact Limiting Short-Time Current	300 A
Contact Limiting Making Current	20 A
Contact Limiting Breaking Current	10 A
Insulation Initial Dielectric Between Open Contacts	1200 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	2500 Vrms
Contact Switching Voltage (Max)	400 VAC
Contact Switching Load (Min)	10mA @ 12V
Coil Resistance	19465 Ω
Coil Power Rating AC	.9 VA, 1 VA
Contact Current Rating	10 A
Coil Voltage Rating	230 VAC
Contact Voltage Rating	240 VAC
Insulation Initial Dielectric Between Contacts & Coil	1200 Vrms

### Configuration Features

Contact Number of Poles	3
Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	3 Form C 3PDT-CO

### Operation/Application

Indicator Type	LED
Current Type	AC
Coil Magnetic System	Monostable

### Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

### Mechanical Attachment

Product Mount Type

Panel &amp; Socket Mount

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU

Compliant with Exemptions

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024 (241)

Candidate List Declared Against: JUNE 2024 (241)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl &gt; 900 ppm.

Solder Process Capability

Hand solderable with lead free solder

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts





TE Part # 2-1415037-1  
PTMU0730



TE Part # 1415037-2  
PTMD0730 (EM31)



TE Part # 1860517-5  
PT170R6 Jumper Bar



TE Part # 9-1415071-1  
PT78730



TE Part # 4-1415036-1  
PTMG0730



TE Part # 5-1419111-9  
PT28800



TE Part # 6-1415037-1  
PT17040



TE Part # 7-1415036-1  
PTML0730



TE Part # 1816124-1  
PT17024



TE Part # 1393162-1  
PT28802

### Also in the Series | SCHRACK Miniature Relay PT



AC Relays(43)



DC Relays(66)



Electromechanical Relays(109)



Plug-In Relays(85)

### Customers Also Bought



TE Part #5053232026  
RNF-100-1/2-9-STK



TE Part #1676644-2  
RN 0805 12R1 0.1% 10PPM 1K RL



TE Part #EH9490-000  
PC4F0020-19NX-1-C



TE Part #9-2176092-4  
RP 2A 0.25W 7K68 0.1% 25PPM 1K RL



## Documents

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_9-1415002-1\\_O.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_9-1415002-1\\_O.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_9-1415002-1\\_O.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### Miniature Relay PT

English

### Product Specifications

#### Definitions General Purpose Relays

English

### Agency Approvals

#### VDE Certificate

English