



Switches > Toggle Switches



Contact Current Rating: **6 A**

Configuration (Pole-Throw): **Double Pole - Double Throw**

Operating Function: **(On) Off (On)**

Number of Positions: **3**

Operating Voltage: **28 VDC**

Features

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Dimensions

Toggle Length	12.32 mm[.485 in]
---------------	-------------------

Product Type Features

Sealed Device	Yes
Switch Connection Type	Wire Lugs
Toggle Style	Flat Actuator
Switch Type	Toggle Switch

Body Features

Actuator Finish	Satin Chrome
Case Color	Green
Product Orientation	Vertical
Bushing Style	Threaded
Bushing Thread Size	1/4-40

Electrical Characteristics

Contact Resistance	10 mΩ
Insulation Resistance	1000 MΩ
Dielectric Withstanding Voltage (Max)	1500 VAC
Contact Current Rating	6 A



Operating Voltage	125 VAC
-------------------	---------

Configuration Features

Configuration (Pole-Throw)	Double Pole - Double Throw
----------------------------	----------------------------

Operating Function	(On) Off (On)
--------------------	---------------

Number of Positions	3
---------------------	---

Housing Features

Process Sealed	No
----------------	----

Contact Features

Contact Base Material	Copper Alloy
-----------------------	--------------

Switch Contact Plating Material	Gold Flash over Silver
---------------------------------	------------------------

Other

EU RoHS Compliance	Compliant
--------------------	-----------

EU ELV Compliance	Compliant with Exemptions
-------------------	---------------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant with Exemptions
-----------------------------	---------------------------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)
--	--

Candidate List Declared Against: JUNE 2022 (224)

SVHC > Threshold:

Pb (3.7% in component)

1,6,7,8,9,14,15,16,17,17,18,18-

dodecachloropentacyclo

[12.2.1.16,9.02,13.05,10]octadeca-7,15-

diene (Dechlorane Plus) (6.7% in

component)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Wave solder capable to 265°C
---------------------------	------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | Alcoswitch MTF



Toggle Switches(5)

Customers Also Bought




TE Part #2-1437558-0
MTA206N=(MSTA) SW TOG DPDT



TE Part #YDTS26F15-19SCV001
PLUG ASSY



TE Part #YDTS20F09-98SNC001
RECP ASSY

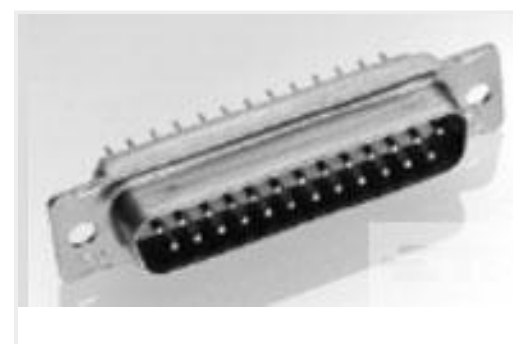


TE Part #1757820-8
AMPLIMITE,ASY,RCPT,STD,109,ZN,3,CT




TE Part #CAT-P592-R472A
PIDG Ring Tongue Terminals




TE Part #625160-000
D-110-41



TE Part #0619-5-1378
R SNAP

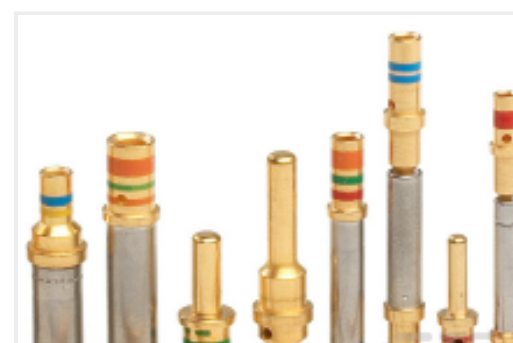

TE Part #38943-12L
CONT SOC ASSY

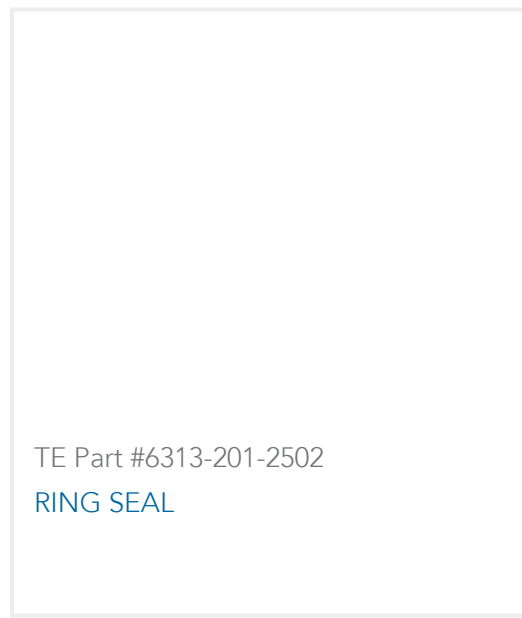

Documents

Product Drawings

[MTF206S=\(MST-49\) SW TOG DPDT](#)

English

Datasheets & Catalog Pages

[2-1773458-6_GREEN_SERIES_SWITCHES](#)

English