

B-155-17 ✓ ACTIVE

RAYCHEM

TE Internal #: E11880-000

19 mm, [.748 in] Expanded Inside, Shrinks To .354 in, SolderSleeve

Shield Terminators

[View on TE.com >](#)



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 125 °C

Expanded Inside Diameter (Min): 19 mm [.748 in]

Recovered Inside Diameter (Max): 8.99 mm [.354 in]

Pre-Installed Lead: No

Resistance Properties: **Splash Protection**

## Features

### Industry Standards

Government Qualified	No
----------------------	----

### Product Type Features

Temperature Indicator	Yes
-----------------------	-----

Temperature Indicator Type	Thermochromic
----------------------------	---------------

### Dimensions

Compatible Jacket Diameter Range	16 mm[.63 in]
----------------------------------	---------------

Product Length	55.5 mm[2.18 in]
----------------	------------------

Shield Outside Diameter (Min)	9 mm[.354 in]
-------------------------------	---------------

Expanded Inside Diameter (Min)	19 mm[.748 in]
--------------------------------	----------------

Recovered Inside Diameter (Max)	8.99 mm[.354 in]
---------------------------------	------------------

### Usage Conditions

Operating Temperature (Max)	125 °C
-----------------------------	--------

Resistance Properties	Splash Protection
-----------------------	-------------------

Wire Temperature (Max)	85 °C
------------------------	-------

### Configuration Features

Pre-Installed Lead	No
--------------------	----

### Other

EU RoHS Compliance	Compliant
--------------------	-----------



EU ELV Compliance

Compliant

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # EG8162-000  
HL1920E-230V-EURO

### Customers Also Bought

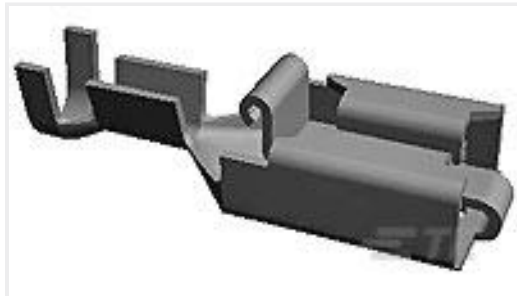

TE Part #160773-4  
PL LP RECEPTACLE 0.5-1.5 MM2  
TPPHBZ



TE Part #9-1768017-2  
EET-0820P-4



TE Part #EC7660-000  
HLX253WE1TS070B



TE Part #709822-2  
XCT 185-12



TE Part #1355328-1  
2POS,AMP MCP 9.5,REC HSG ASSY,  
SLD



TE Part #91536-1  
CCII MINI-UMNL PIN 20-18 16-20x2  
ASSY



TE Part #9-1768017-7  
EET-0825P-4



TE Part #031307-000  
B-150-13



TE Part #605262-1  
FUSION TAPE, 1" X .020" X 10FT



TE Part #2-1102664-5  
HIP-K.24/64.STO.1.2

## Documents

### Product Drawings

B-155-17

English