

HDP26-24-35SN-L015 ✓ ACTIVE

DEUTSCH | DEUTSCH HDP, DEUTSCH HD

TE Internal #: HDP26-24-35SN-L015

35 Position Housing, Housing for Female Terminals, Wire-to-Panel, Sealable, Black, Wire & Cable, Power, Panel Mount, -55 – 125 °C [-67 – 257 °F]

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Number of Positions: **35**

Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: **1.6 mm, 1 mm [.063 in, .04 in]**

Connector System: **Wire-to-Panel**

Sealable: **Yes**

[All DEUTSCH HDP20 Housings \(357\)](#)

Features

Housing Features

Housing Material	PA 66 GF
------------------	----------

Industry Standards

IP Rating	IP67
UL Flammability Rating	UL 94V-0

Dimensions

Compatible Insulation Diameter Range	1.9 – 3.2 mm, 1.4 – 3.8 mm [.055 – .15 in][.075 – .125 in]
Product Width	43.2 mm[1.7 in]
Product Length	43.2 mm[1.7 in]
Connector Height	55.4 mm[2.18 in]

Packaging Features

Packaging Quantity	40
--------------------	----



Packaging Method	Tray
------------------	------

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarizing Slot
Mating Alignment	With
Connector Mounting Type	Panel Mount

Other

Serviceable	Yes
Connector Position Assurance Capable	No
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	250 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	Size 16, Size 20
Contact Type	Socket
Mating Pin Diameter	1.6 mm, 1 mm [.063 in][.04 in]
Contact Current Rating (Max)	13 A, 7.5 A

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Panel
Sealable	Yes
Primary Locking Feature	Contact Retainer
Connector & Contact Terminates To	Wire & Cable

Configuration Features



Blank Cavity Position	0
Connector Modification	Threaded Adapter
Connector Seal Code	N Seal
Number of Positions	35

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.4% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | DEUTSCH HD

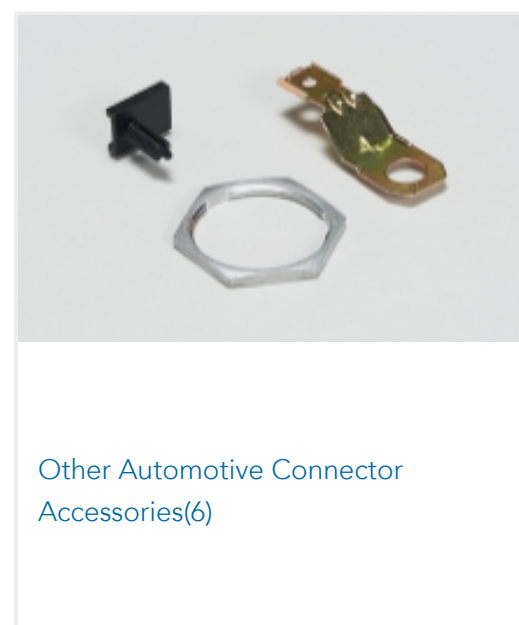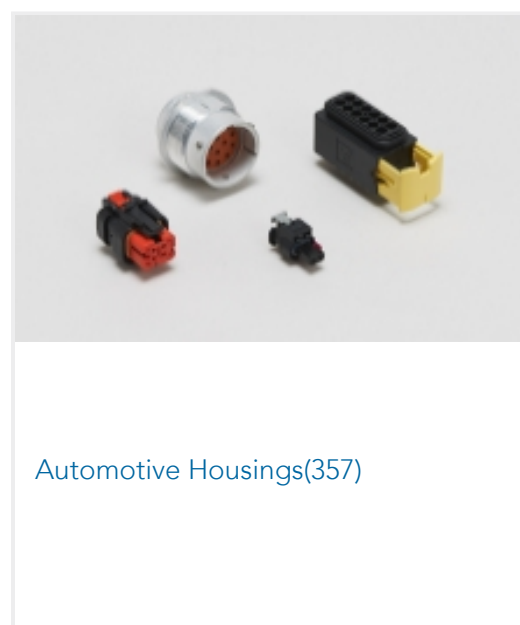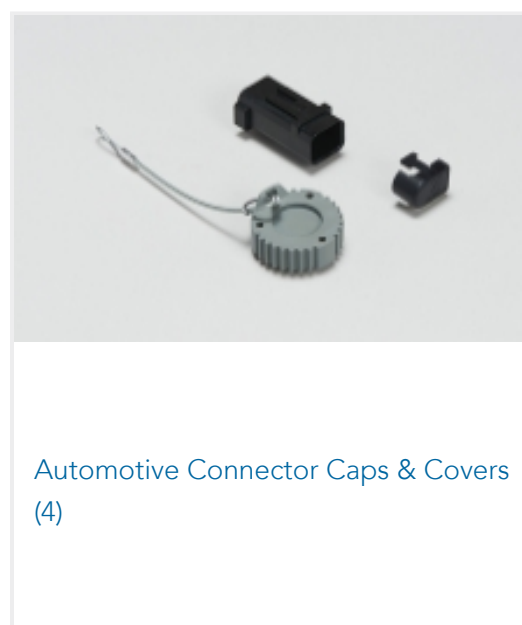

Also in the Series | DEUTSCH HDP



Automotive Connector Caps & Covers (4)

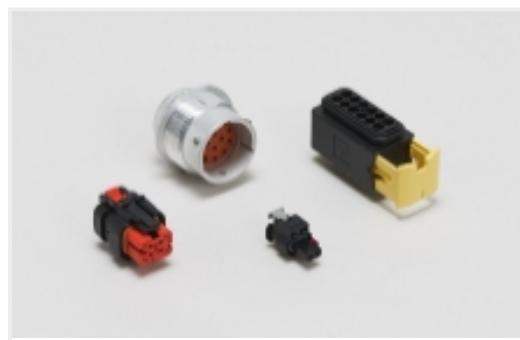

Automotive Housings(357)



Connector Backshells(10)



Connector Seals & Cavity Plugs(1)



Insertion & Extraction Tools(11)



Other Automotive Connector Accessories(6)

Customers Also Bought




TE Part #CAT-H396-CH8172
DEUTSCH HDP20 Housings



TE Part #SRK06-FLA-64A-001
PLG, 64P, BLK, E, A



TE Part #DT04-12PB-BL04
REC, 12P, BLK, N, ENH KEY, FLANGE, B



TE Part #152455
ALTERNATOR CONN SERVICING PACK

Documents

Product Drawings

PLG, 35P, BLK, N, THD, 16/20, S

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_HDP26-24-35SN-L015_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_HDP26-24-35SN-L015_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_HDP26-24-35SN-L015_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

[DEUTSCH HD30 & HDP20 CONNECTOR SERIES](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English