



## GTL-1 3/4 Midget Flange Base Lens End



Part Number	Design Voltage	Amps	Spot Characteristic	Life Hours	Filament Type
252	2.5	.35	A*	10,000	C-2R


## GTL-3 Miniature Screw Base Lens End



Part Number	Design Voltage	Amps	Spot Characteristic	Life Hours	Filament Type
112	1.20	.22	None	5	S-2
113	1.30	.22	None	15	S-2
222	2.25	.25	None	5	C-2R
243	2.33	.27	None	10	C-6
246	3.80	.22	None	20	C-6

## Spot Characteristics

Spots produced by lens end caps vary in shape from elliptical to round. Their respective spot characteristics are defined as follows with the lamp .375" from tip to surface. The specific spot shape will be defined within the limits shown.

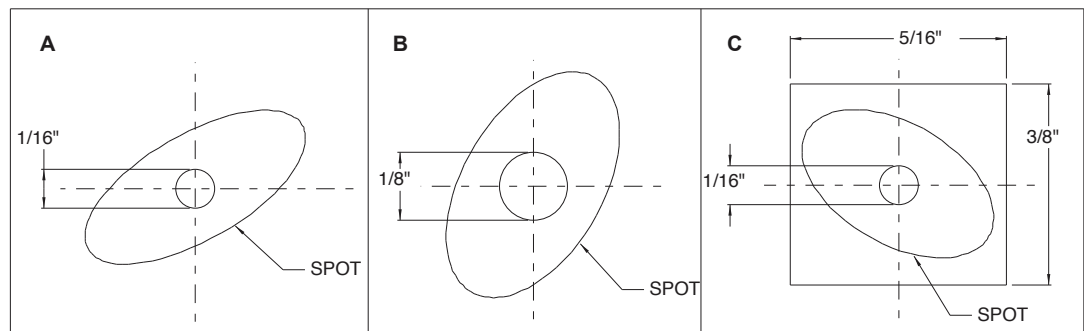

A. 750 footcandles minimum over a 1/16" DIA. circle centered on the axis of the lamp.

B. 750 footcandles minimum over a 1/8" DIA. circle centered on the axis of the lamp.

C. 750 footcandles minimum over a 1/16" DIA. circle centered on the axis of the lamp.