



Zero Insertion Force PGA Test and Burn-in Sockets (cont.)

Grid Size	No. of Pins	Dim. "C"	Dim. "A"	Dim. "B"	Dim. "D"	Dim. "L"
* 12 x 12	144	1.100 [27.94]	1.894 [48.10]	1.510 [38.35]	1.675 [42.54]	2.170 [55.11]
13 x 13	169	1.200 [30.48]				
* 14 x 14	196	1.300 [33.02]	2.094 [53.20]	1.710 [43.43]	1.875 [47.62]	2.370 [60.20]
15 x 15	225	1.400 [35.56]				
* 16 x 16	256	1.500 [38.10]	2.294 [58.26]	1.910 [48.51]	2.075 [52.70]	2.570 [65.27]
17 x 17	289	1.600 [40.64]				
* 18 x 18	324	1.700 [43.18]	2.494 [63.34]	2.110 [53.59]	2.275 [57.78]	2.770 [70.35]
19 x 19	361	1.800 [45.72]				
* 20 x 20	400	1.900 [48.26]	2.694 [68.42]	2.310 [2.475]	2.475 [62.86]	2.970 [75.43]
21 x 21	441	2.000 [50.80]				

*Top and right hand side row left out

ORDERING INFORMATION

See Data Sheet No. 10004 for additional information.

XXX-PXX XX XXX-1X

No. of pins

Grid size

Plating:

- 2=Gold contact/Tin tail over Nickel
- 2TL= Gold contact/Tin/Lead tail over Nickel
- 6=Nickel Boron (Spinodal pin only)
- Consult factory for plating options not listed

Solder tail pin

Footprint number (see PGA Footprint Section)


Series designator:
 PRS=standard (without mounting ears)
 PRM=with mounting ears
 PLS=handle on left side without ears
 PLM=handle on left side with ears

Many PGA footprints are available and listed, by footprint number, in the PGA Footprint section of the Aries Website. In addition, special footprints can be accommodated. Use the diagram and follow special footprint instructions.

SPECIAL FOOTPRINT INSTRUCTIONS:

1. Make a copy of this sheet.
2. Fill in circles for footprint desired using the key below.
3. Fill in the information below, including series and plating options. See "Ordering Information" above for details.
4. Send to Aries for a prompt quotation.

TOP VIEW

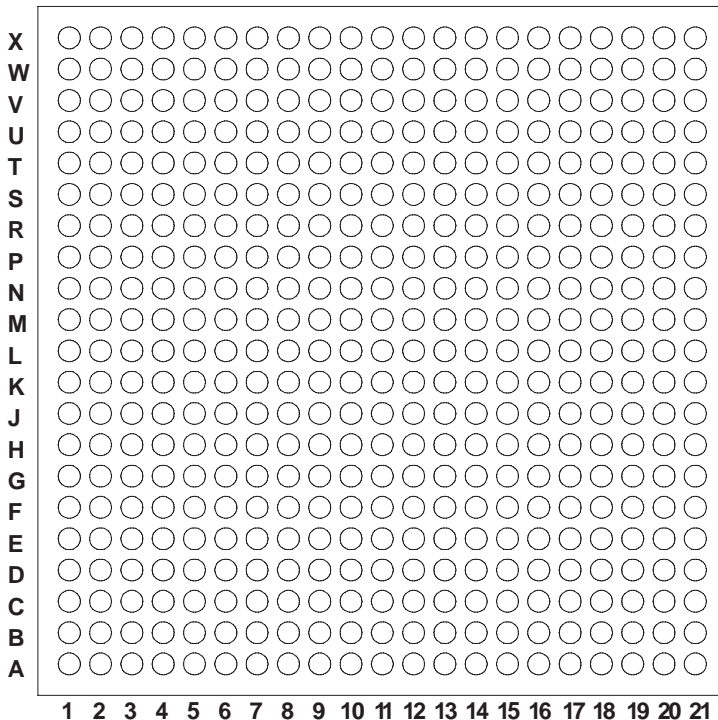

COMPANY NAME: _____

ADDRESS: _____

CITY: _____

REQUESTED BY: _____

PHONE NO.: _____

DATE: _____

TOTAL NUMBER OF PINS: _____

SERIES (circle one): PRS PRM PLS PLM

PLATING (circle one): 2 2TL 6

- =No pins
- =Pins
- =Plugged holes

ARIES
 ELECTRONICS, INC.
<http://www.arieselec.com> • info@arieselec.com

NORTH AMERICA
 Frenchtown, NJ USA
 TEL: (908) 996-6841
 FAX: (908) 996-3891



EUROPE
 TEL: +44 870 240 0249
 FAX: +44 871 919 6033
europa@arieselec.com



10005
 REV.G