

# PRODUCTS


Chilisin provides inductor turnkey solutions for EMI, power and RF and a global technical team to support its customers. Chilisin has become one of the few inductor suppliers capable of providing a complete "one-stop shopping" experience.



HEI201610A

Home > Products > Power Inductor > HEI201610A

- Power Inductor
  - Chip Inductor
  - Bead
  - Common Mode Choke
  - ◆ Product Search
- 

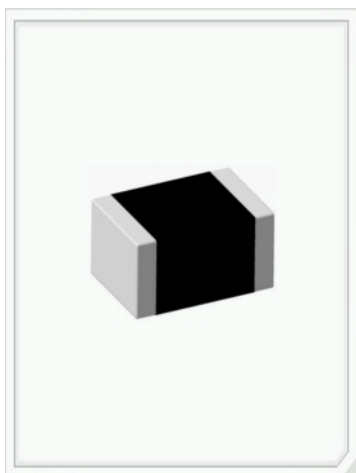

## Part Number : HEI201610A-R24M-Q8

Structure	Closed Magnetic Circuit Type- Molding Processing & for Ultra High Current
Inductance(?H)	0.24
Tolerance(±%)	20
Test Frequency	2MHz,0.2V
RDC(?)Max	0.027
Isat(A)Typ	7
Isat(A)Max	5.6
Irms(A)Typ	4.8
Irms(A)Max	3.9
Operating Temperature	- 4 0 °C ~ 1 2 5 °C(Including self - temperature rise)
L(mm)	2.0±0.2
W(mm)	1.6±0.2
T(mm)	1.0Max.

1.Irms : Applied the current to coils  
the temperature rise shall not be more than 40°C

P/N	HEI201610A-R24M-Q8
Part Numbering	
Dimensions	
Packing	  
Recommended Pattern	
Electrical Characteristics Curve	

[Back](#)