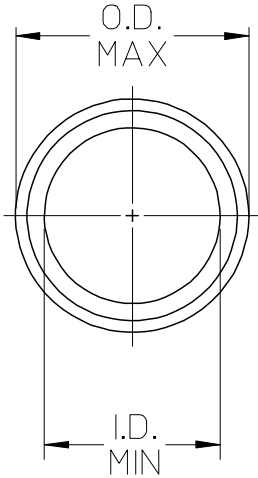
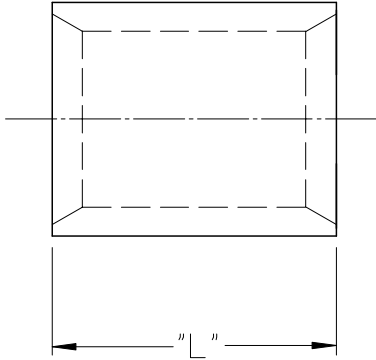


	6	5	4	3	2	19205															
	MATERIAL NO.	ENG. NO.	WIRE SIZE	I.D. MIN.	O.D. MAX.	"L" (E)															
	192070001	AS-302	22-18	.060/1.50	.130/3.30	.305/.325 (7.75/8.26)															
	192050001	BS-304	16-14	.091/2.30	.160/4.10	.295/.315 (7.50/8.00)															
D	192050003	CS-303	12-10	.130/3.30	.225/5.70	.295/.315 (7.50/8.00)															
	192050004	D-355	8	.165/4.20	.295/7.50	.360/.390 (9.14/9.91)															
	192050006	E-361	6	.230/5.80	.374/9.50	.430/.460 (10.92/11.68)															
	192050007	F-365	4	.277/7.00	.457/11.60	.500/.530 (12.70/13.46)															
	192050008	G-373	2	.357/9.00	.538/13.70	.635/.665 (16.13/16.89)															
	192050009	H-384	1/0	.439/11.20	.620/15.70	.735/.765 (18.67/19.43)															
	192050010	J-389	2/0	.496/12.60	.697/17.70	.725/.755 (18.42/19.18)															
	192150049	K-394	3/0	.545/13.80	.760/19.30	.735/.765 (18.67/19.43)															
C	192150050	L-379	4/0	.621/15.80	.860/21.80	.760/.790 (19.30/20.07)															
	NOTE(S): 1. MATERIAL: COPPER 2. PLATING: ELECTRO-TIN 																				
	REV'D "L" DIM EC NO: ETC2008-0020 DRWN:RSTONE 2007/08/17 CHKD:JMACNEIL 2007/08/20 APPR:JMACNEIL 2007/08/20 REV QUALITY SYMBOLS  0.05  0.1 GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± .005</td><td>± .0004</td></tr><tr><td>3 PLACES</td><td>± .003</td><td>± .0002</td></tr><tr><td>2 PLACES</td><td>± .002</td><td>± .0001</td></tr><tr><td>1 PLACE</td><td>± .001</td><td>± .00005</td></tr></table> ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS SCALE 2:1 DESIGN UNITS INCH DIMENSION STYLE IN/MM DRAWN BY DLM DATE 03/07/08 CHECKED BY HEB DATE 03/07/08 APPROVED BY RWD DATE 03/07/08 THIRD ANGLE PROJECTION REVISE ON CAD ONLY TITLE VERSAKRIMP SEAMLESS PARALLEL CONNECTORS  MOLEX INCORPORATED MATERIAL NO. (SEE CHART) DOCUMENT NO. SD-19205-007 SHEET NO. 1 OF 1							mm	INCH	4 PLACES	± .005	± .0004	3 PLACES	± .003	± .0002	2 PLACES	± .002	± .0001	1 PLACE	± .001	± .00005
	mm	INCH																			
4 PLACES	± .005	± .0004																			
3 PLACES	± .003	± .0002																			
2 PLACES	± .002	± .0001																			
1 PLACE	± .001	± .00005																			
	fb_frame_A rev. B1 2000/08/01	5	4	3	2	1															