

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0717640518](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Low Profile, Dual Row, Right-Angle, High Temperature, 18 Circuits, 0.76µm Gold (Au) Selective Plating, with 8.13mm Mating Pin Length

Documents:

3D Model	Application Specification 713080001-AS-000 (PDF)
3D Model (PDF)	Packaging Specification PK-70873-0075-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-71764-001 (PDF)	

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71764
Application	Board-to-Board, Signal, Wire-to-Board
Overview	C-Grid Connector Products
Product Name	C-Grid
UPC	822348719051


Physical

Breakaway	Yes
Circuits (Loaded)	18
Circuits (maximum)	18
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	1.659/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.79mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Solder Process Data

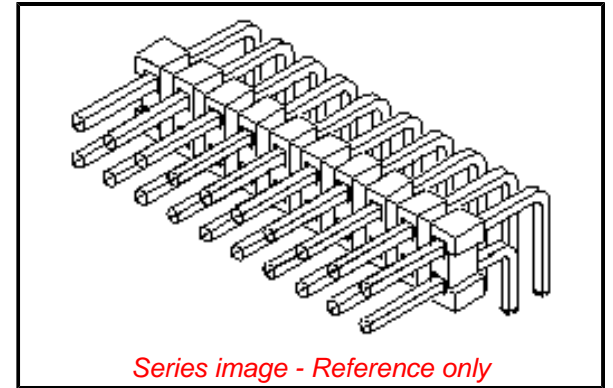

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[71764 Series](#)

Duration at Max. Process Temperature (seconds)	030
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	713080001-AS-000
Packaging Specification	PK-70873-0075-001
Product Specification	PS-71764-001
Sales Drawing	SD-71764-001-001

This document was generated on 09/28/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION