


PEG124KF3220ML1

aka A141KL221M040A

Capacitor, aluminum, 220 uF, +/-20% Tol

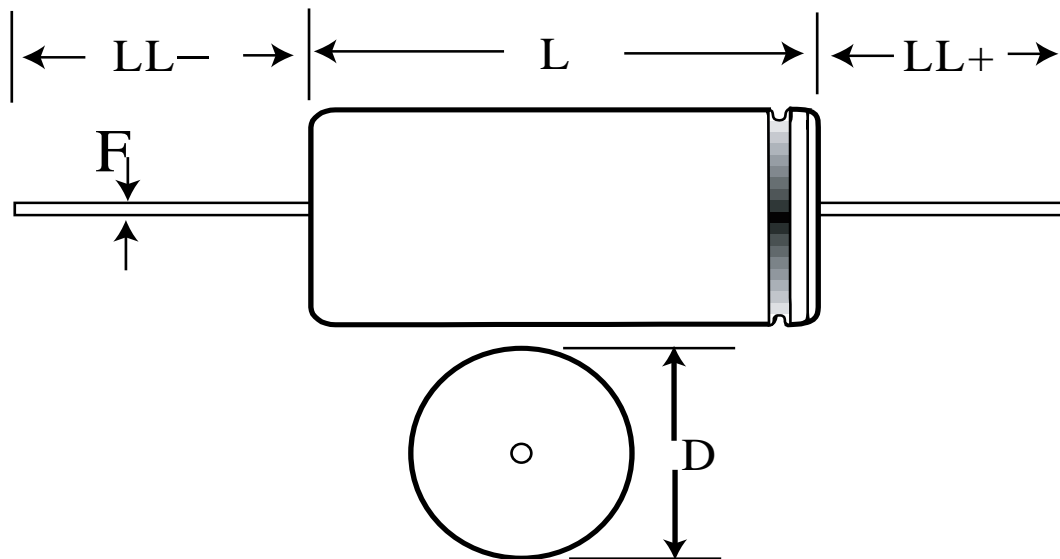

Dimensions (mm)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
D	16	+/-0.5	Capacitance:	220 uF
L	29	+/-1	Rated Temperature:	125C
LL+	42	+3/-2	Voltage @ rated temp:	40V
LL-	42	+3/-2	VDC Surge:	46WVDC
F	0.8	+/-0.03	Life @ rated temp:	7800 h
			Temperature Range:	-40/+125C
			RoHS:	Yes
			Low ESR:	Yes
			Low Impedance:	Yes
			Tolerance:	+/-20%
			Part Type Description:	Axial Cylindrical Aluminum Electrolytic
			Style:	Axial Cylindrical
			Lead Type:	Wire Leads
			Lead Form:	Straight
			ESR at 100Hz @ room temp:	410 mOhm
			ESR at 100kHz @ room temp:	190 mOhm
			Leakage Current:	26.4 uA
			Leakage Condition:	5min/20c
			Ripple 100Hz @ rated temp:	0.575 A
			Miscellaneous Electrical:	series-PEG124 series-PEG124 Rifa version ref: 0
			Package Kind:	Bulk
			Package Quantity:	125