

丸形

Round Type


φ 3.0mm Series

Type No.	Lighting Color
LN38GP	Green
LN38GCP	Green
LN38WP	Green
LN38CP	Green

絶対最大定格 Absolute Maximum Ratings (Ta=25 °C)

Lighting Color	P <sub>0</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)*	V <sub>A</sub> (V)	T <sub>opr</sub> (°C)	T <sub>stg</sub> (°C)
Green	90	30	150	4	-25~+85	-30~+100

\* I<sub>FP</sub>の条件は、duty 10%、Pulse width 1 msec. The condition of I<sub>FP</sub> is duty 10%、Pulse width 1 msec

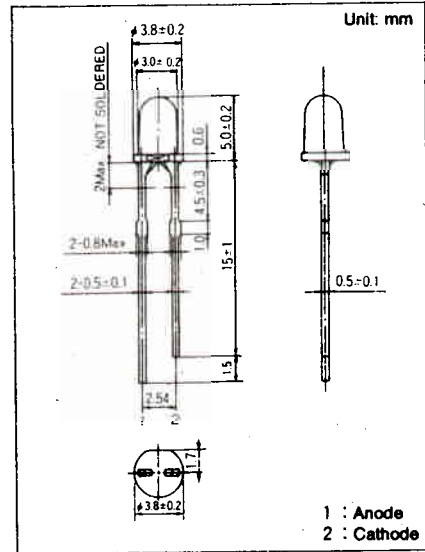

電気的光学的特性 Electro-Optical Characteristics (Ta=25 °C)

Type No.	Lighting Color	Lens Color	I <sub>0</sub>			V <sub>F</sub>		λ <sub>p</sub>	Δλ	I <sub>F</sub>	I <sub>R</sub>	
			Typ.	Min.	I <sub>F</sub>	Typ.	Max.				I <sub>F</sub>	Max.
LN38GP	Green	Green Diffused	2.0	0.7	20	2.2	2.8	565	30	20	10	4
LN38GCP	Green	Green Clear	4.0	1.5	20	2.2	2.8	565	30	20	10	4
LN38WP	Green	White Diffused	4.0	1.5	20	2.2	2.8	565	30	20	10	4
LN38CP	Green	Clear	4.0	1.5	20	2.2	2.8	565	30	20	10	4
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	μA	V

