DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRA | RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST
AD	39

P	F	ZONE	LTR	REVISIONS DESCRIPTION	DATE	APPROVED
			D	ECN 1166 REVISED & REDRAWN	-	-
			E	REV ECN 1736	-	-
				SUPSD -1 THRU -4 PER ECN AR2268	4-89	CO
			G	REV LOC & DIST AD-4171	3-90	BF
			H	REV PER 0010-0832-93	7-93	JG
			J	REV PER 0010-0782-93	2-16-94	JG
			K	REV PER 0010-1884-93	2-16-94	JG
			L	REV PER 0010-0689-94	5-31-94	JG
			M	REV PER 0010-0809-94	5-31-94	JG
			N	REV PER 0310-0412-97	02-FEB-98	JG
			P	REV PER 0G3C-0019-00	19JUL00	KW

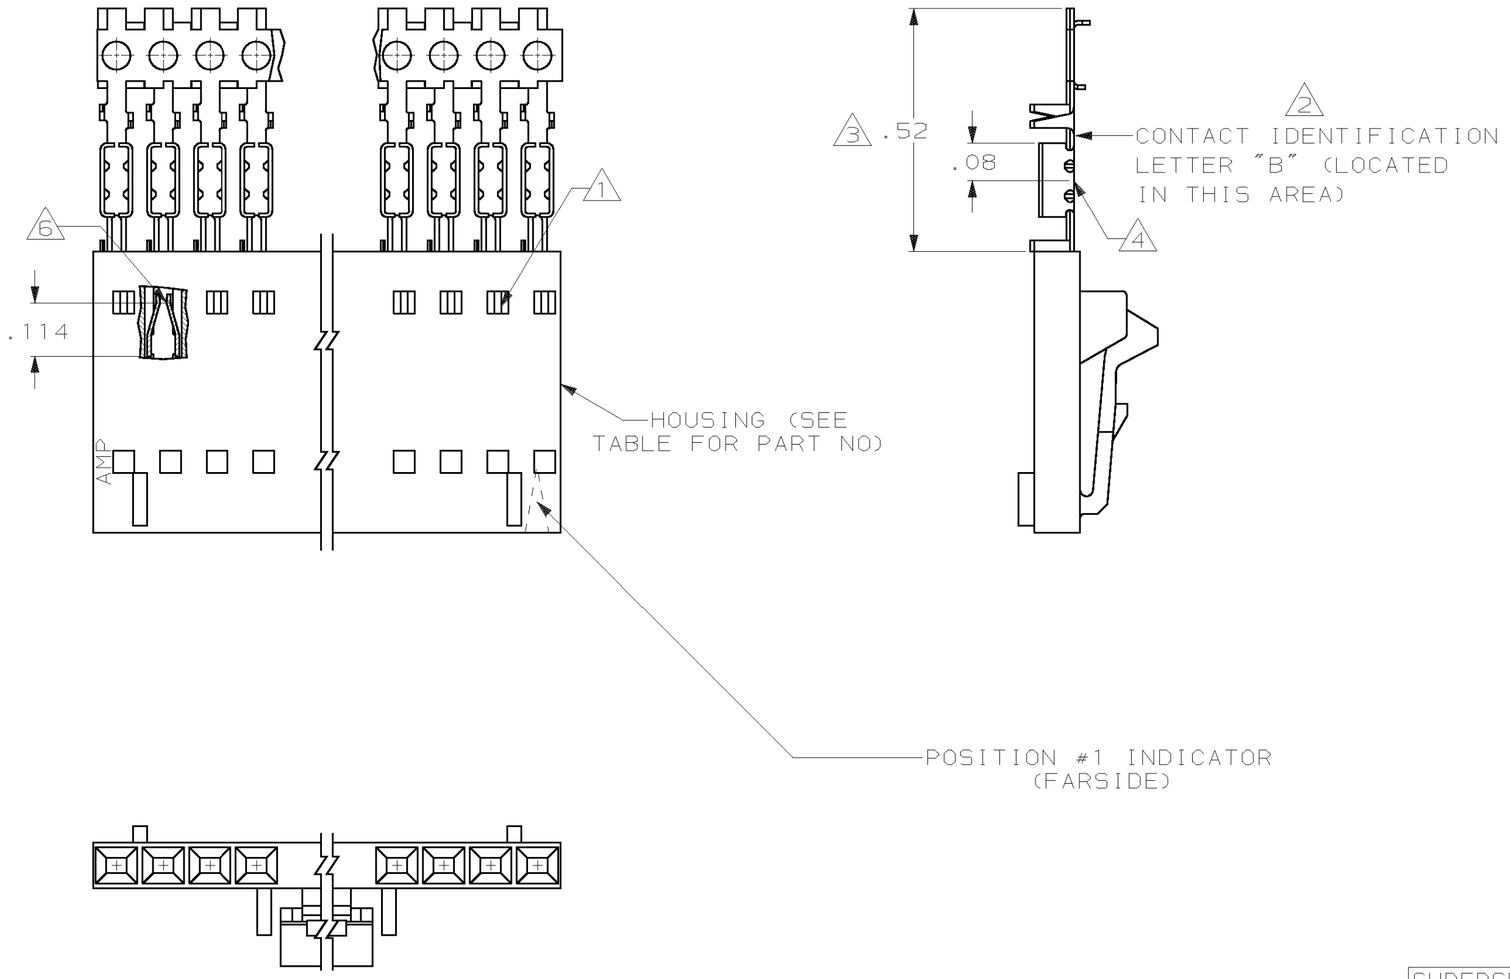

HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
2-104257-4	25	2-103644-4
2-104257-3	24	2-103644-3
2-104257-2	23	2-103644-2
2-104257-1	22	2-103644-1
2-104257-0	21	2-103644-0
1-104257-9	20	1-103644-9
1-104257-8	19	1-103644-8
1-104257-7	18	1-103644-7
1-104257-6	17	1-103644-6
1-104257-5	16	1-103644-5
1-104257-4	15	1-103644-4
1-104257-3	14	1-103644-3
1-104257-2	13	1-103644-2
SUPERSEDED BY 1-103957-1	1-104257-1	12	1-103644-1
SUPERSEDED BY 1-103957-0	1-104257-0	11	1-103644-0
SUPERSEDED BY 103957-9	104257-9	10	103644-9
SUPERSEDED BY 103957-8	104257-8	9	103644-8
SUPERSEDED BY 103957-7	104257-7	8	103644-7
SUPERSEDED BY 103957-6	104257-6	7	103644-6
SUPERSEDED BY 103957-5	104257-5	6	103644-5
SUPERSEDED BY 103957-4	104257-4	5	103644-4
SUPERSEDED BY 103957-3	104257-3	4	103644-3
SUPERSEDED BY 103957-2	104257-2	3	103644-2
SUPERSEDED BY 103957-1	104257-1	2	103644-1

1. CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
2. USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
3. THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
4. POINT OF MEASUREMENT FOR PLATING THICKNESS
5. FOR STRIP ASSEMBLIES SEE PART NUMBER 103957
6. POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON :
2 PL DEC ± .02
3 PL DEC ± .005
ANGLES ± -

MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK

CONTACTS- PHOS BRONZE

FINISH: CONTACTS:
.000015 GOLD IN THE CONTACT AREA, .000050-.000100 TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

DR 11-4-86 L A MAYER
CHK 11-12-86 P de Jong
APPD 11-12-86 P de Jong
APPD 11-13-86 J SCHIEFER

PRODUCT SPEC 108-25034
APPLICATION SPEC 114-25026
WEIGHT -

AMP | AMP INCORPORATED Harrisburg, Pa. 17105

NAME
RCPT ASSY, AMPMODU® MTE, SINGLE ROW, .100¢, LATCHED & POLARIZED, FOR #22-#26 AWG WIRE SIZE

SIZE	FSCM NO	DRAWING NO
C	00779	103644

SCALE 4:1 SHEET 1 OF 1

103644

AMP 1471-7 REV 10-84

CUSTOMER DRAWING