




MQS

TE Internal #: 6-928918-1

MQS, Automotive Terminals, Tab, Tab Width .025 in [.63 mm], Tab Thickness .025 in [.63 mm], Terminal Transmits 0 – 24 A (Low Power)

[View on TE.com >](#)

Terminals & Splices > Automotive Terminals > MQS, RECEPTACLE AND TAB

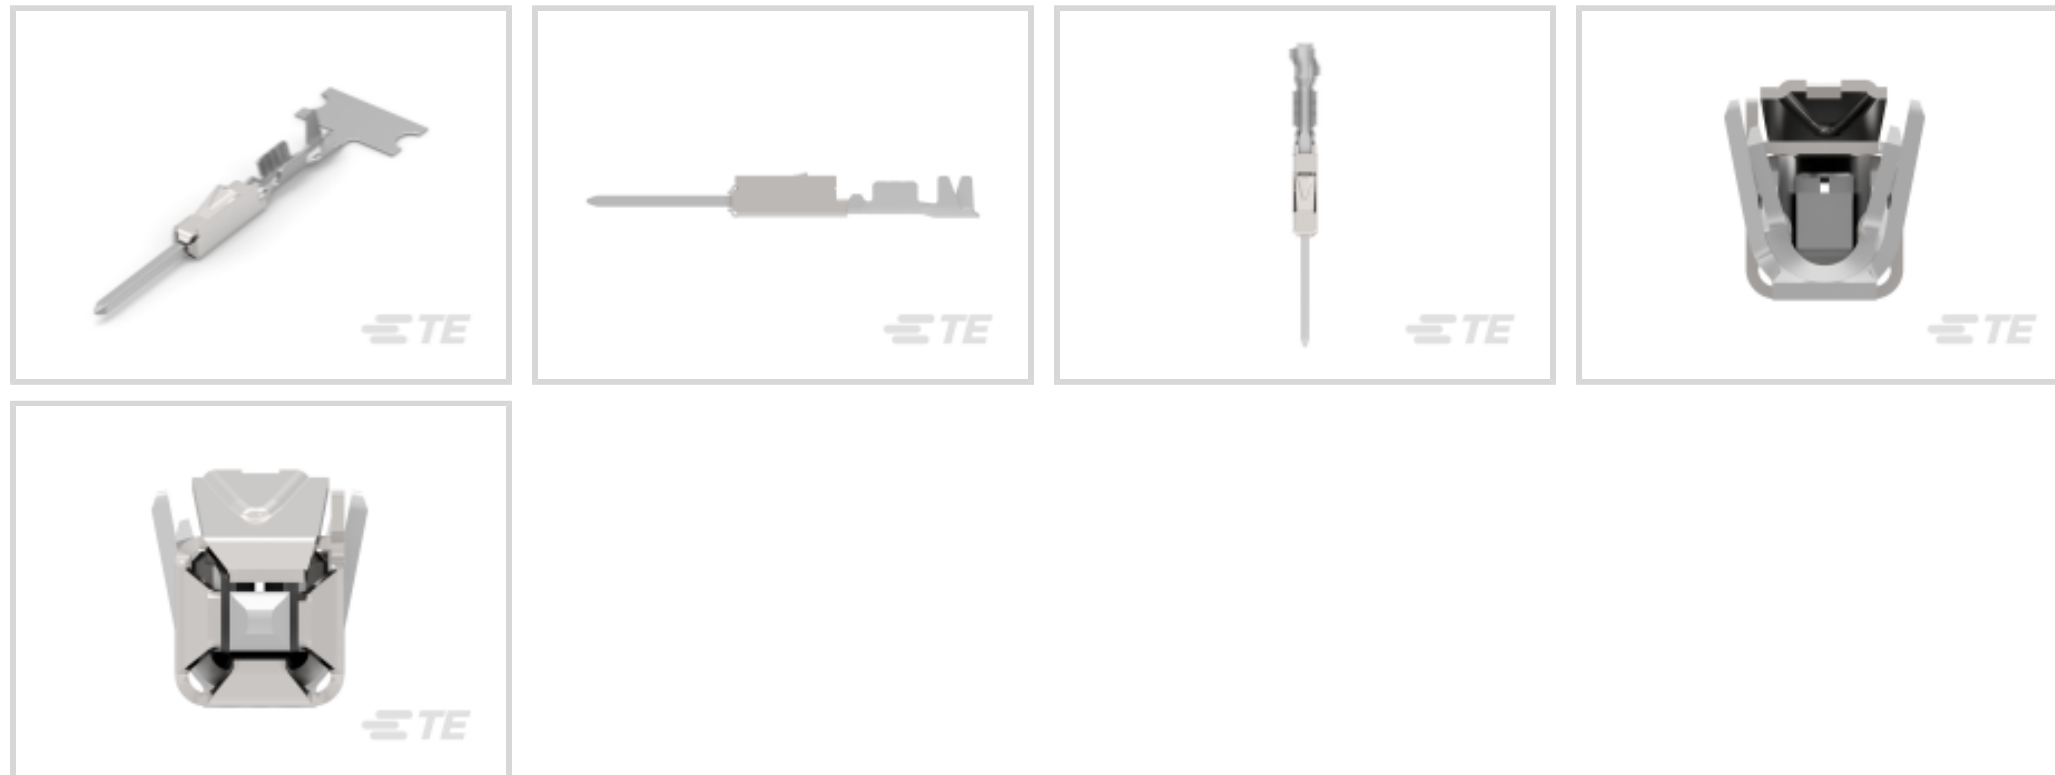

Terminal & Splice Type: **Tab**

Mating Tab Width: **.63 mm [.025 in]**

Mating Tab Thickness: **.63 mm [.025 in]**

Terminal Transmits: **0 – 24 A (Low Power)**

Wire Size: **24 – 22 AWG**

[All MQS, RECEPTACLE AND TAB \(128\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Locking Lance
Automotive Terminal Wire Type	Copper

Contact Features

Typical Current Rating	7.5 A
Crimp Type	F-Crimp
Terminal & Splice Type	Tab
Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Automotive Terminal Interface Plating	Tin (Sn)
Contact Termination Area Plating Material	Tin (Sn)

Termination Features



Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Automotive Terminal Termination Method	Wire
--	------

Dimensions

Wire Size	.2 – .35 mm ²
-----------	--------------------------

Wire Size Search	22 AWG, 23 AWG, 24 AWG
------------------	------------------------

Wire Insulation Diameter	1.1 – 1.6 mm [.043 – .063 in]
--------------------------	-------------------------------

Usage Conditions

Insulation Requirement	Uninsulated
------------------------	-------------

Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C [176 °F] [185 °F] [194 °F] [212 °F] [221 °F] [230 °F] [248 °F]
-----------------------------	--

Operating Temperature Range	-40 – 120 °C [-40 – 248 °F]
-----------------------------	-----------------------------

Industry Standards

Agency/Standard	LV214
-----------------	-------

Packaging Features

Packaging Method	Reel
------------------	------

Packaging Quantity	13000
--------------------	-------

Other

Terminal Transmits	0 – 24 A (Low Power)
--------------------	----------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 2298627-1
24POS, HYBRID, TAB HSG ASSY, UNSLD, COD A



TE Part # 2298637-1
60POS, HYBRID, TAB HSG ASSY, UNSLD, COD A



TE Part # 4-1579018-5
EXTRACTION TOOL




TE Part # 5-2151493-1
OCEAN_2.0_APPLICATION-S-055F0720


Also in the Series | MQS




Automotive Connector Caps & Covers (133)

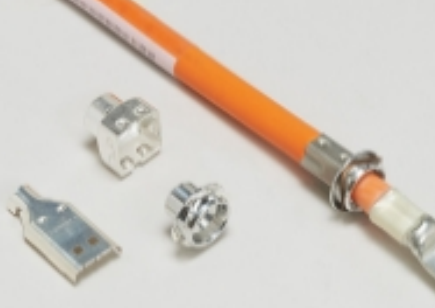


Automotive Connector EMC Shielding (2)

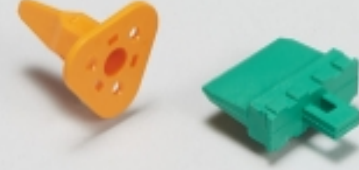


Automotive Connector Locks & Position Assurance (29)




Automotive Headers (206)



Automotive Housings (499)




Automotive Seals & Cavity Plugs (26)

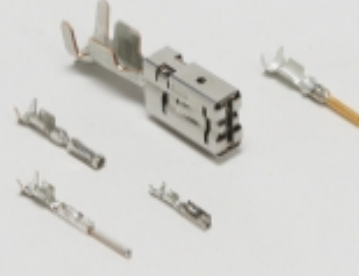


Automotive Terminals (98)



Data Connectivity Headers (1)



Insertion & Extraction Tools (42)



Other Automotive Connector Accessories (13)

Customers Also Bought




TE Part #1719183-1
8POS MQS REC COD A




TE Part #5-963716-1
MQS, RECEPTACLE AND TAB



TE Part #1-2141857-1
AMP MCP 2.8, CONTACT

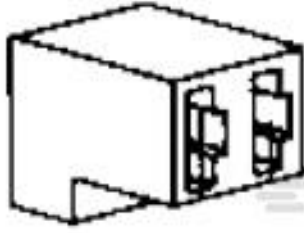

TE Part #180918
FF 250 REC HSG 2P NYLON CLEAR

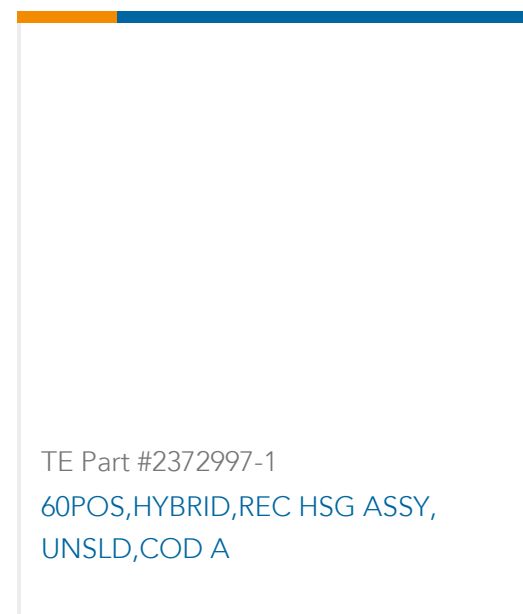

Documents

Product Drawings

[MQS0,63 Sn tab LL unseal. 0,2-0,35](#)

English

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)

[ENG_CVM_CVM_6-928918-1_W_c-6-928918-1-w.2d_dxf.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_6-928918-1_W_c-6-928918-1-w.3d_igs.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_6-928918-1_W_c-6-928918-1-w.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Micro Quadlok Interconnection System \(MQS\)](#)

English

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

German

[Application Specification](#)

English

Product Environmental Compliance

[MD_6-928918-1_05252018523_dmtec](#)

English

[MD_6-928918-1_05252018523_dmtec](#)

English

