




1339167-2 Product Details

Share | Print | Email

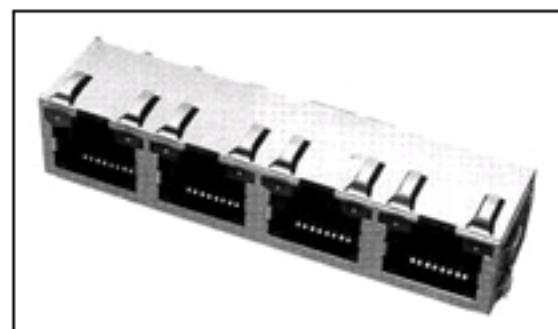

1339167-2

TE Internal Number: 1339167-2



Search for Replacement Parts

View 3D PDF

PCB Mounted Jacks - Single Port, Multi-port and Stacked

5 of 6 EU RoHS/ELV Compliant (Find RoHS Compliant Alternates/Statement of Compliance)

Product Highlights:

- Connector
- Preloaded
- Multiple Port Configuration
- 1 x 4 Jack Configuration
- Jack Type = RJ45

[View all Features](#)

Quick Links

- ▶ Pricing & Availability
- ▶ Search for Tooling
- ▶ Product Feature Selector
- ▶ Contact Us About This Product

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- High Performance Modular Plugs & Jacks, PCB Mounted (PDF, English)
- Stacked and Multiport Fast Ethernet Modular Jack (Wh... (PDF, English)

Application Specifications:

- Modular Jacks (PDF, English)

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version B)
- 3D Model (IGES, Version B)
- 3D Model (STEP, Version B)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Termination Method to PC Board = Solder
- Performance Category = Cat 5
- LED = Without
- Grounding Options = Panel Ground and PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black
- Shield Material = Copper Zinc Alloy

Mechanical Attachment:

- Panel Mount Retention = Without

Electrical Characteristics:

- Shielded = Yes

Termination Features:

- Solder Tail Contact Plating = Tin-Lead over Nickel

Dimensions:

- PCB Tail Length (mm [in]) = 3.56 [0.140]

Body Features:

- Inverted Jack Face = No
- Shield Plating = Bright Tin over Nickel
- Number of Contacts Loaded, RJ45 (8 Positions) = 8
- PCB Ground Tab Location (mm [in]) = 4.57 [0.180]

Contact Features:

- Contact Plating, Mating Area, Material = Gold (50)
- Contact Base Material = Phosphor Bronze

Housing Features:

- Housing Material = PCT GF
- UL Flammability Rating = UL 94V-0

Configuration Features:

- Preloaded = Yes
- Port Configuration = Multiple
- Jack Configuration = 1 x 4
- Number of Positions = 8
- Number of Contacts Loaded = 8
- Number of PCB Ground Tabs = 5
- Number of Panel Ground Tabs = 15

Industry Standards:

- RoHS/ELV Compliance = ELV compliant, 5 of 6 Compliant
- Lead Free Solder Processes = Wave solder capable to 240°C

Operation/Application:

- Shield Information = Wave panel grounds.

Packaging Features:

- Packaging Method = Tray
- Packaging Quantity = 20

Product Availability:

- Region = Asia, North America

Other:

- Brand = AMP
- Comment = Recommended applications: Fast Ethernet, 10Base-T Ethernet, and 10/100 Base-T Ethernet (Cat 5 on two pair 1/2, 3/6).

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

