

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [14-56-2239](#)  
**Status:** **Active**  
**Overview:** [C-Grid® Products](#)  
**Description:** 2.54mm Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version A, Non-polarized, Wire Size 26 AWG, 0.76µm Gold (Au), 23 Circuits

**Documents:**

[3D Model](#) [Product Specification PS-70400 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Ribbon Cable / Wire Trap Connectors
Series	<a href="#">70400</a>
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Compliant	No
Overview	<a href="#">C-Grid® Products</a>
Product Name	SL™
UPC	800753983113

**Physical**

Circuits (Loaded)	23
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm max.
Wire Size AWG	26
Wire/Cable Type	Discrete Wire, Ribbon Cable


**Electrical**

Current - Maximum per Contact	3A
Voltage - Maximum	250V

**Material Info**

**Reference - Drawing Numbers**

Product Specification	PS-70400
-----------------------	----------

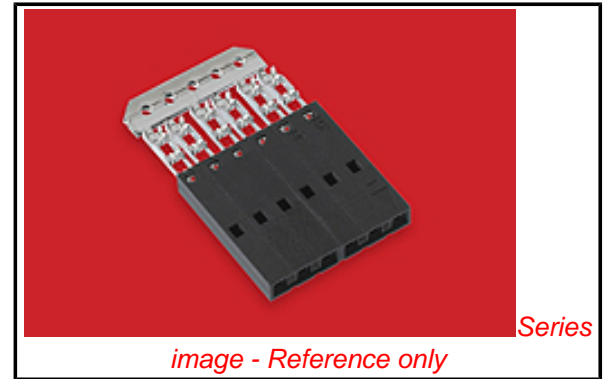

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC Not Reviewed**

**Low-Halogen Status Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[70400Series](#)

**Mates With**

Single Row headers and housings, [8624](#) , [70203](#) , [42375](#) , [42377](#)

**Use With**

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Ribbon Cable Tool Kit, Press Not Included	<a href="#">0622016600</a>

Hawk™ Ribbon Cable Terminator without Break-off	<u>0623003000</u>
Hawk™ Ribbon Cable Terminator with Break-off	<u>0623005300</u>
IDT - Semi-automatic - Bench-Top Terminator	<u>0011200949</u>
Hawk™ Semi- Automatic Discrete Wire Terminator	<u>0623003100</u>
Hawk™ Semi- Automatic Discrete Wire Terminator for Rebuilt CE Approved*	<u>0623004900</u>
Hawk™ Flat Flex Cable Terminator with Break-off	<u>0623005200</u>
IDT Discrete Handtool Module	<u>0621000700</u>

This document was generated on 06/24/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**