

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1511195004](#)

Status: **Active**

Overview: [Milli-Grid Connector System](#)

Description: 2.00mm Pitch, Milli-Grid PCB Header, Dual Row, Right-Angle, Through Hole, 2.00µm Tin (Sn) Plating, without Peg, 4.60mm PC Tail Length, without Pick and Place Tape, 4 Circuits, Glow-Wire Capable, Tube

Documents:

[Drawing \(PDF\)](#)

[3D Model \(PDF\)](#)

[3D Model](#)

[Product Specification PS-151117-0001-001 \(PDF\)](#)

[Application Specification 503940001-AS-000 \(PDF\)](#)

[Application Specification 503940002-AS-000 \(PDF\)](#)

[Packaging Specification PK-151119-0001-001 \(PDF\)](#)

[Packaging Specification PK-151119-3000-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980

UL E29179

General

Product Family PCB Headers

Series [151119](#)

Application Board-to-Board, Signal, Wire-to-Board

Overview [Milli-Grid Connector System](#)

Product Name Milli-Grid

UPC 889056751490

Physical

Breakaway No

Circuits (Loaded) 4

Circuits (maximum) 4

Color - Resin Black

First Mate / Last Break No

Flammability 94V-0

Glow-Wire Capable Yes

Guide to Mating Part No

Keying to Mating Part None

Lock to Mating Part Yes

Material - Metal Copper Alloy

Material - Plating Mating Tin

Material - Plating Termination Tin

Material - Resin Liquid Crystal Polymer

Net Weight 0.308/g

Number of Rows 2

Orientation Right Angle

PC Tail Length 4.60mm

PCB Locator No

PCB Retention None

PCB Thickness - Recommended 3.60mm

Packaging Type Tube

Pitch - Mating Interface 2.00mm

Pitch - Termination Interface 2.00mm

Plating min - Mating 2.000µm


Plating min - Termination 2.000µm

Polarized to Mating Part Yes

Polarized to PCB Yes

Shrouded Yes

Stackable No

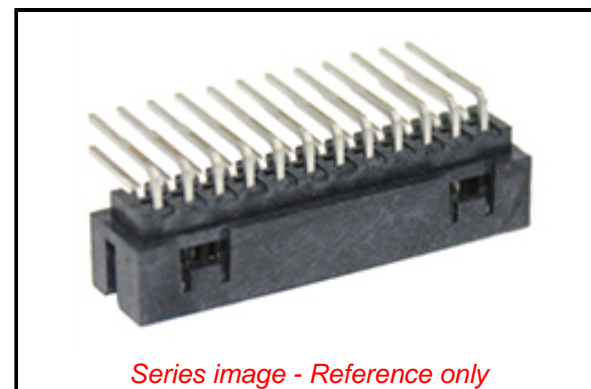

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[151119 Series](#)

Mates With

Milli-Grid Receptacle Housing [151192](#) ,
[51110](#)
Milli-Grid PCB Receptacles
[78787](#) , [78788](#) , [79107](#) , [79109](#)

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	2.0A
Voltage - Maximum	125V AC

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Application Specification	503940001-AS-000, 503940002-AS-000
Packaging Specification	PK-151119-0001-001, PK-151119-3000-001
Product Specification	PS-151117-0001-001
Sales Drawing	SD-151119-0001-001

This document was generated on 10/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION