

## Sensor/Actuator cable - SAC-4P-MICFS/ 5,0-PUR - 1527171

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Sensor/Actuator cable, 4-position, PUR/PVC, black-gray RAL 7021, free cable end, on Socket straight 1/2"-20UNF, C-coded, Cable length: 5 m



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	25 pc
Weight per Piece (excluding packing)	1.0 g
Custom tariff number	85444290
Country of origin	United States

### Technical data

#### Dimensions

Length of cable	5 m
Stripping length of the free conductor end	50 mm

#### Ambient conditions

Degree of protection	IP65
	IP67
	IP68

#### General

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Insulation resistance	≥ 10 MΩ
Coding	C - dual keyway
Status display	No
Overvoltage category	II
Degree of pollution	3

#### Material

Flammability rating according to UL 94	HB
Contact material	CuSn

## Sensor/Actuator cable - SAC-4P-MICFS/ 5,0-PUR - 1527171

### Technical data

#### Material

Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR

#### Standards and Regulations

Flammability rating according to UL 94	HB
--	----

#### Cable

Cable type	PUR/PVC black
Cable type (abbreviation)	350
UL AWM style	20549
Conductor cross section	0.34 mm <sup>2</sup>
AWG signal line	22
Conductor structure signal line	42x 0.10 mm
Core diameter including insulation	1.5 mm ±0.05 mm
Thickness, insulation	approx. 0.3 mm (Core insulation)
	≥ 0.38 mm (Outer cable sheath)
	approx. 0.35 mm (Inner sheath)
Wire colors	green, red/black, red/white, red
External sheath, color	black-gray RAL 7021
External cable diameter D	5.2 mm ±0.2 mm
Smallest bending radius, fixed installation	52 mm
Smallest bending radius, movable installation	52 mm
Number of bending cycles	2000000
Bending radius	52 mm
Traversing path	5 m
Traversing rate	3 m/s
Cable weight	39 kg/km
Outer sheath, material	PUR
Material, inner sheath	PVC
Material conductor insulation	PVC
Conductor material	Bare Cu litz wires
Insulation resistance	≥ 1 GΩ*km (at 20 °C)
Conductor resistance	max. 58 Ω/km (at 20 °C)
Nominal voltage, cable	≤ 300 V
Test voltage, cable	≥ 3000 V

# Sensor/Actuator cable - SAC-4P-MICFS/ 5,0-PUR - 1527171

## Technical data

### Cable

Flame resistance	in accordance with DIN UL-Style 20549
------------------	---------------------------------------

## Classifications

### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27279218

### ETIM

ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

## Approvals

### Approvals

---

#### Approvals

UL Listed / cUL Listed / cULus Listed

---

#### Ex Approvals

---

#### Approvals submitted

---

# Sensor/Actuator cable - SAC-4P-MICFS/ 5,0-PUR - 1527171

## Approvals

### Approval details

UL Listed	
Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	300 V

cUL Listed	
Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	300 V


cULus Listed	
--------------	--

## Drawings

### Circuit diagram


### Schematic diagram

Contact assignment of 1/2" DIN assignment 1/2"-20UNF socket, 4-pos., view female side plugs / sockets




## Sensor/Actuator cable - SAC-4P-MICFS/ 5,0-PUR - 1527171

Cable cross section



Dimensional drawing

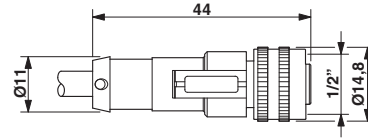

PUR/PVC black [350]

1/2"-20UNF socket, straight

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>