

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Panel feed-through, straight, SPEEDCON, M17, number of positions: 6+PE, type of contact: Socket, Flat gasket, 4x Ø 3.2, shielded: yes, flange dimensions: 25.75 mm x 25.75 mm, degree of protection: IP67, cable diameter range: 9 mm ... 11 mm, number of positions: 7, connection method: Crimp connection, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243328

Your advantages

- Reduced size: ideal for compact devices
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly
- Flexible use: reliably connect various cable diameters
- User-specific, suitable for front and rear mounting

Commercial Data

Item number	1618782
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	ABRCEK
Catalog Page	Page 135 (C-2-2019)
GTIN	4046356817394
Weight per Piece (including packing)	54.2 g
Weight per Piece (excluding packing)	43.8 g
Customs tariff number	85366990
Country of origin	DE

Technical Data

Notes

Order information:	Order crimp contacts Ø 1 mm separately
--------------------	--

Safety note

Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p>
	<ul style="list-style-type: none"> • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	<ul style="list-style-type: none"> • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	<ul style="list-style-type: none"> • The products are suitable for applications in plant, controller, and electrical device engineering.
	<ul style="list-style-type: none"> • When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	<ul style="list-style-type: none"> • Assembled products may not be manipulated or improperly opened.
	<ul style="list-style-type: none"> • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	<ul style="list-style-type: none"> • When using the product in direct connection with third-party manufacturers, the user is responsible.
	<ul style="list-style-type: none"> • For operating voltages > 50 V AC, conductive connector housings must be grounded
	<ul style="list-style-type: none"> • Ensure that the protective or functional ground has been properly connected.
	<ul style="list-style-type: none"> • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	<ul style="list-style-type: none"> • Only use tools recommended by Phoenix Contact
	<ul style="list-style-type: none"> • The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
	<ul style="list-style-type: none"> • Operate the connector only when it is fully plugged in and interlocked.
<ul style="list-style-type: none"> • Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. 	
<ul style="list-style-type: none"> • Observe the minimum bending radius of the cable. Lay the cable without twisting it. 	
<ul style="list-style-type: none"> • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting 	

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

warnings (e.g. DIN EN ISO 13732-1:2008-12).

Mounting

Mounting	4x Ø 3.2
----------	----------

Product properties

Product type	Circular connectors (device side)
Number of positions	7
Connection profile	6+PE
Application	Power
Locking type	SPEEDCON
Series	ST
Shielded	yes
Coding	N
Thread type	M17

Dimensions

Housing

Flange dimensions	25.75 mm x 25.75 mm
-------------------	---------------------

Electrical properties

Contact

Contact diameter	1 mm
Max. current	14 A
Nominal voltage U_N	630 V
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	6 kV

Contact

Contact diameter	1 mm
------------------	------

Connection data

Conductor connection

Connection method	Crimp connection
Type of contact	Socket

Connector

Type	straight
Direction of rotation	Standard

Connection 1

Head design	Socket
-------------	--------

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

Cable/line

External cable diameter	9 mm ... 11 mm
-------------------------	----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C


ST-6ES1N8ACK04S - Panel feed-through

1618782

<https://www.phoenixcontact.com/pc/products/1618782>


Drawings

Dimensional drawing

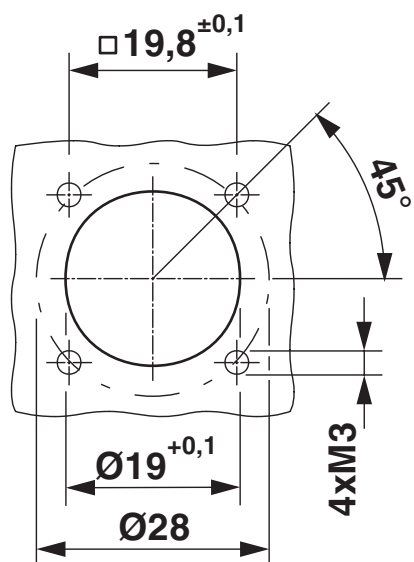

Installation dimensions

Diagram

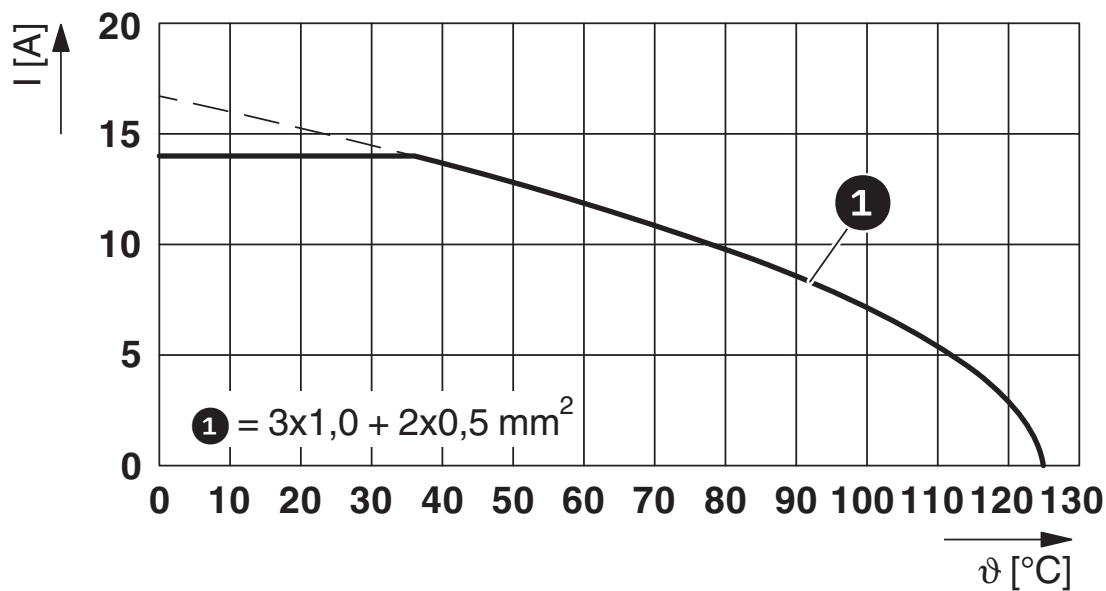


I = current strength, ϑ = ambient temperature, 3x 14 A + 2x 2 A constant

ST-6ES1N8ACK04S - Panel feed-through

1618782


<https://www.phoenixcontact.com/pc/products/1618782>

Schematic diagram

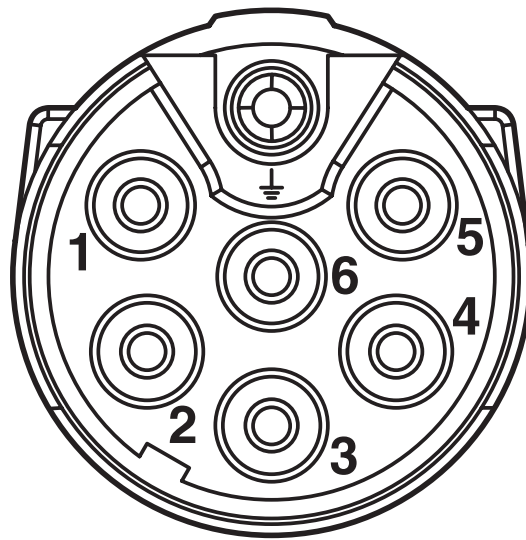

Connector pin assignment

Dimensional drawing

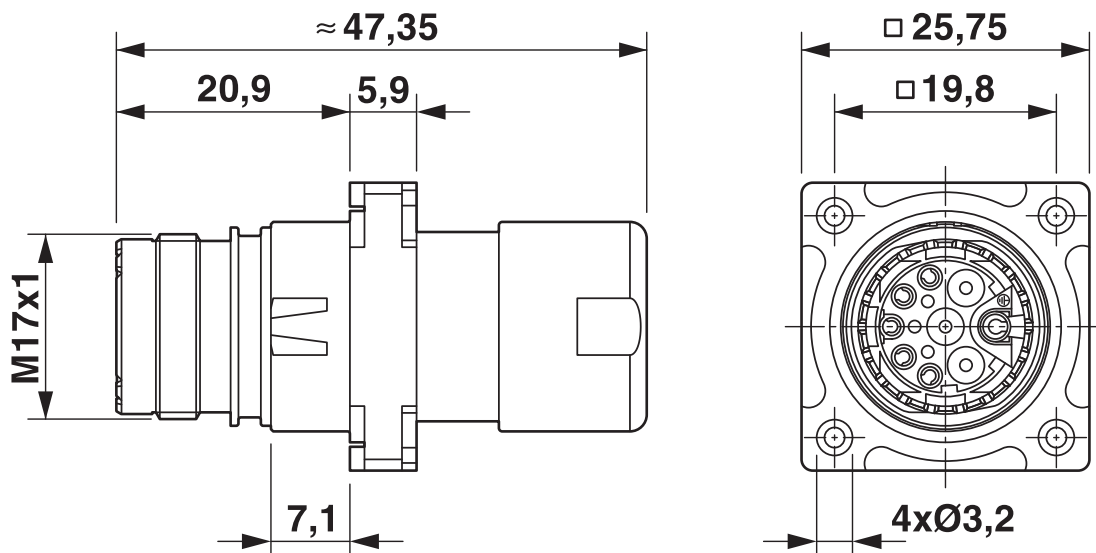

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

Approvals



cUL Recognized

Approval ID: E335019-20111129



UL Recognized

Approval ID: E335019-20111129



EAC

Approval ID: B.01687



UL Recognized

Approval ID: E153698-20140124



cUL Recognized

Approval ID: E153698-20140124

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

Classifications

ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

ST-6ES1N8ACK04S - Panel feed-through



1618782

<https://www.phoenixcontact.com/pc/products/1618782>

Accessories

ST-10KS010 - Crimp contact

1618239

<https://www.phoenixcontact.com/pc/products/1618239>



Crimp contact, turned, Single contact, contact diameter: 1 mm, crimp range: 0.06 mm² ... 0.25 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243216

ST-10KS035 - Crimp contact

1618464

<https://www.phoenixcontact.com/pc/products/1618464>



Crimp contact, turned, contact diameter: 1 mm, crimp range: 0.25 mm² ... 1 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243216

ST-6ES1N8ACK04S - Panel feed-through

1618782

<https://www.phoenixcontact.com/pc/products/1618782>



ST-Z0023 - Protective cap

1621049

<https://www.phoenixcontact.com/pc/products/1621049>

Plastic protection cap for connectors with M17 compact external thread



ST-Z0016 - Color-coding

1617993

<https://www.phoenixcontact.com/pc/products/1617993>

Color-coding, color: green



ST-6ES1N8ACK04S - Panel feed-through

1618782

<https://www.phoenixcontact.com/pc/products/1618782>



ST-Z0017 - Color-coding

1618049

<https://www.phoenixcontact.com/pc/products/1618049>

Color-coding, color: orange



ST-Z0018 - Color-coding

1618050

<https://www.phoenixcontact.com/pc/products/1618050>

Color-coding, color: black



Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com