

Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Cable connector, CA, straight, shielded: yes, SPEEDCON locking, M23, No. of pos.: 6, Direction of rotation: Standard, type of contact: Pin, Crimp connection, cable diameter range: 10 mm ... 14.5 mm, coding:N



Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Crimping connection: vibration- and temperature-resistant assembly

Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Commercial Data

Item number	1619505
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	A12
Product Key	ABRBFH
Catalog Page	Page 84 (C-2-2019)
GTIN	4046356823500
Weight per Piece (including packing)	92.4 g
Weight per Piece (excluding packing)	88.5 g
Customs tariff number	85366990
Country of origin	DE

Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Technical Data

Notes

Order information:	Order crimp contacts 6 x Ø 2 mm separately
--------------------	--

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Connector

Insulating body

Note	Order information: Order crimp contacts 6 x Ø 2 mm separately
Coding	N
Insulation body material	PA 6.6
Connection method	Crimp connection
Contact type	Pin
Application	Signal
Number of positions	6
Direction of rotation	Standard
Connection profile	6
Contact diameter	2 mm
Signal contacts	
Signal contacts min.	1 mm ²
Signal contacts max.	2.5 mm ²
Nominal current	20 A
Rated voltage Signal contact	48 V AC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

Housing material	CuZn, GD-Zn
Type of locking	SPEEDCON locking
Degree of protection (plugged in)	IP67
Thread type	M23

Seal

External cable diameter	10 mm ... 14.5 mm
Seal material	NBR

Cable connector - CA-06P1N8A8008S




1619505

<https://www.phoenixcontact.com/us/products/1619505>

Drawings

Dimensional drawing

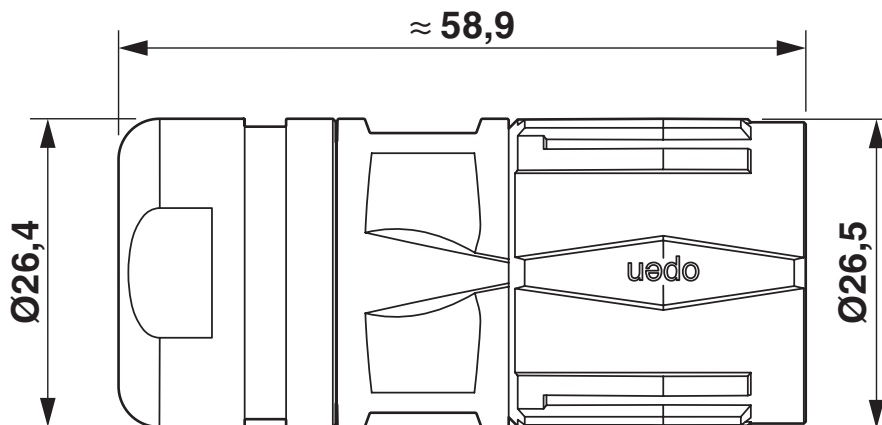


Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Approvals

 cUL Recognized Approval ID: E335019-20141210				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	48 V	10 A	- 14	-

 UL Recognized Approval ID: E335019-20141210				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	48 V	17 A	- 14	-

cULus Recognized

Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Classifications

ECLASS

ECLASS-9.0	27440102
ECLASS-10.0.1	27440102
ECLASS-11.0	27440102

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Cable connector - CA-06P1N8A8008S

1619505

<https://www.phoenixcontact.com/us/products/1619505>

Accessories

Protective cap

Protective cap - RC-Z2058 - 1604223

<https://www.phoenixcontact.com/us/products/1604223>

Plastic protection cap for connectors with M23 knurled nut



Plastic anti-static dust protection cap

Plastic anti-static dust protection cap - RC-Z2468 - 1611796

<https://www.phoenixcontact.com/us/products/1611796>

Plastic protection cap, antistatic, for connectors with M23 knurled nut



Cable connector - CA-06P1N8A8008S

1619505

<https://www.phoenixcontact.com/us/products/1619505>



Torque screwdriver

Torque screwdriver - SF-Z0028 - 1607456

<https://www.phoenixcontact.com/us/products/1607456>



Torque screwdriver, series: RC

Hook wrench

Hook wrench - SF-Z0027 - 1607455

<https://www.phoenixcontact.com/us/products/1607455>



Hook wrench, series: RC

Cable connector - CA-06P1N8A8008S

1619505

<https://www.phoenixcontact.com/us/products/1619505>

Color-coding

Color-coding - RF-Z0014 - 1620588

<https://www.phoenixcontact.com/us/products/1620588>

Color-coding, color: green



Color-coding

Color-coding - RF-Z0015 - 1620592

<https://www.phoenixcontact.com/us/products/1620592>

Color-coding, color: orange



Cable connector - CA-06P1N8A8008S

1619505

<https://www.phoenixcontact.com/us/products/1619505>

Color-coding

Color-coding - RF-Z0016 - 1620593

<https://www.phoenixcontact.com/us/products/1620593>

Color-coding, color: black



Crimp contact

Crimp contact - RC-5CP2000 - 1603513

<https://www.phoenixcontact.com/us/products/1603513>

Crimp contact, turned, contact diameter: 2 mm, crimp range: 1 mm² ... 1.5 mm²



Cable connector - CA-06P1N8A8008S

1619505

<https://www.phoenixcontact.com/us/products/1619505>

Crimp contact

Crimp contact - RC-5AP2000 - 1603505

<https://www.phoenixcontact.com/us/products/1603505>



Crimp contact, turned, contact diameter: 2 mm, crimp range: 1.5 mm² ... 2.5 mm²

Square mounting flange

Square mounting flange - RF-Z0003 - 1607905

<https://www.phoenixcontact.com/us/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF

Cable connector - CA-06P1N8A8008S



1619505

<https://www.phoenixcontact.com/us/products/1619505>

Crimp contact

Crimp contact - RC-5SP2000 - 1603529

<https://www.phoenixcontact.com/us/products/1603529>



Crimp contact, turned, contact diameter: 2 mm, crimp range: 0.5 mm² ... 0.75 mm²

Metal protective cap

Metal protective cap - CA-Z0077 - 1627224

<https://www.phoenixcontact.com/us/products/1627224>



Metal protection cap with steel wire and loop, for M23 signal connectors with knurled nut for fastening to the cable

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com