

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



CHARX connect comfort, AC charging cable, with vehicle charging connector and open cable end, for charging electric vehicles (EV) with alternating current (AC) via type 1 vehicle charging inlets, with protective cap, with locking option for padlock, Type 1, IEC 62196-2, SAE J1772, C-Line, PHOENIX CONTACT logo, cable: 5 m, black, straight

Product Description

AC charging cable with vehicle charging connector and free cable end for charging electric vehicles (EV) with alternating current (AC) via type 1 vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

Your advantages

- Complete product range
- Convenient handling due to the ergonomic, triple award-winning design
- Available with your logo on request – for consistent branding of your charging station
- Longitudinal water tightness reliably prevents water ingress
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Tested in accordance with automotive standards LV124, LV214, and LV215-2
- Tested in accordance with EV Ready 37 requirements
- Laser-marked mating face in accordance with DIN EN 17186

Commercial Data

Item number	1628126
Packing unit	1 pc
Minimum order quantity	1 pc
Product Key	XWBAAA
Catalog Page	Page 25 (C-7-2019)
GTIN	4055626385389
Weight per Piece (including packing)	2,130 g
Weight per Piece (excluding packing)	2,063 g
Customs tariff number	85444290
Country of origin	PL

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Technical Data

Product properties

Product type	AC charging cable
Application	for charging electric vehicles (EV) with alternating current (AC) via type 1 vehicle charging inlets for installation at charging stations for electromobility (EVSE)
Type	AC charging cable with vehicle charging connector and open cable end
Design	with protective cap with locking option for padlock
Locking type	Locking option for actuating lever with 4 mm U-lock
Affixed logo	PHOENIX CONTACT logo
Charging mode	Mode 3, Case C
Charging standard	Type 1

Electrical properties

Type of signal transmission	Pulse width modulation
Note on the connection method	Crimp connection, cannot be disconnected
Coding	480 Ω (Lever actuated) 150 Ω (Lever not actuated)
Type of charging current	AC single-phase
Charging power	8 kW
Charging current	32 A

Power contact

Number	3 (L1, N, PE)
Rated voltage	250 V AC
Rated current	32 A

Signal contact

Number	2 (CP, CS)
Rated voltage	30 V AC
Rated current	2 A

Dimensions

Vehicle charging connector

Width	58 mm
Height	151.1 mm
Depth	236.1 mm

Vehicle charging connector

Width	58 mm
Height	151.1 mm
Depth	236.1 mm

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Material specifications

Color (Housing)	black (9005)
Color (Handle area)	black (9005)
Color (Actuating element)	silver gray (7001)
Color (Mating face)	black (9005)
Color (Protective cap)	black (9005)
Color (Cable)	black (9005)
Material (Vehicle charging connector)	Plastic
Material (Cable outer sheath)	TPE-U
Material (Contact surface)	Silver

Cable / line

Cable length	5 m
Wiring standards/regulations	prEN 50620 / DIN EN 50620
Wiring certifications	VDE
Cable weight	max. 305 kg/km
Cable type	Class 5
Cable type	straight
Cable structure	3 x 6.0 mm ² + 1 x 0.5 mm ²
External cable diameter	12.8 mm ±0.4 mm
Outer sheath, material	TPE-U
Stripping length of the sheath	70 mm ±5 mm
Cable resistance	≤ 0.0033 Ω/m (based on a power core, at an ambient temperature of 20°C)

Mechanical properties

Bending radius	min. 96 mm (7.5x diameter)
----------------	----------------------------

Mechanical data

Insertion/withdrawal cycles	> 10000
Insertion force	< 75 N
Withdrawal force	< 75 N

Environmental and real-life conditions

Ambient conditions

Degree of protection Vehicle charging inlet	IP44 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
Degree of protection Protective cap	IP54
Ambient temperature (operation)	-30 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	5000 m (above sea level)

Standards and regulations

AC charging cable - EV-T1G3K-1AC32A- 5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Standards

Standards/regulations	IEC 62196-2
	SAE J1772


AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11

1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Drawings

Schematic diagram

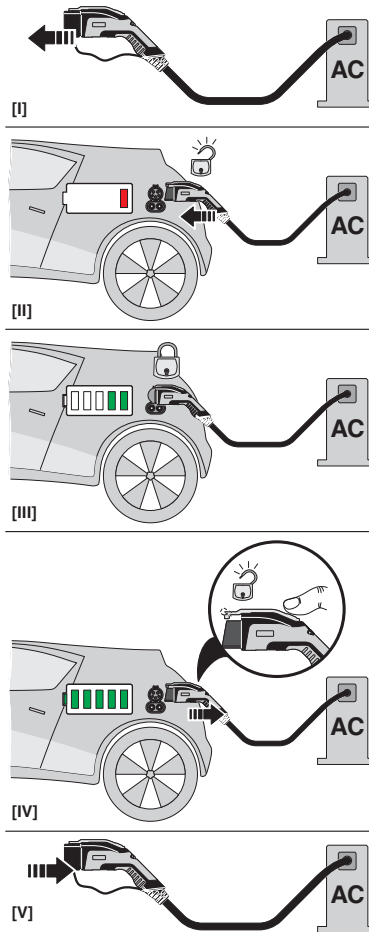

Operating instructions


AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126


<https://www.phoenixcontact.com/pc/products/1628126>

Dimensional drawing

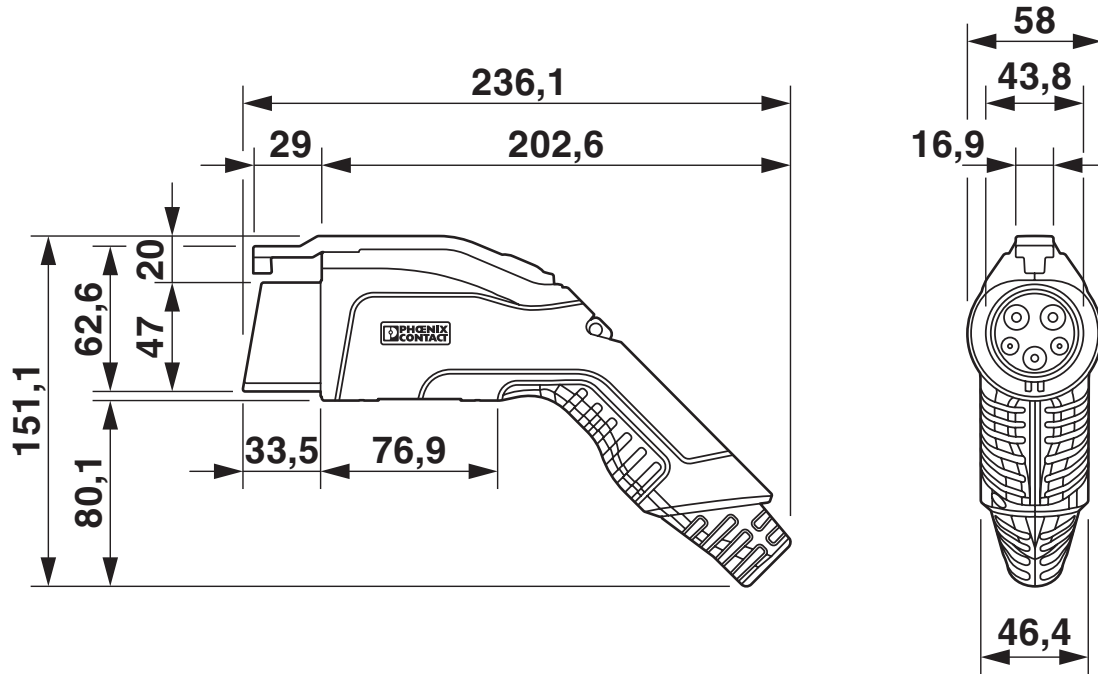

Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.

Connection diagram

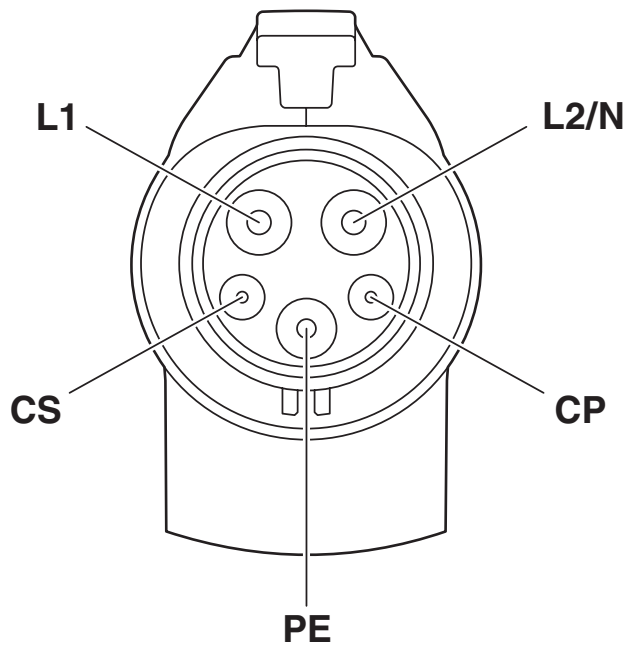


Pin assignment of the Vehicle Connector

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11

1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Schematic diagram

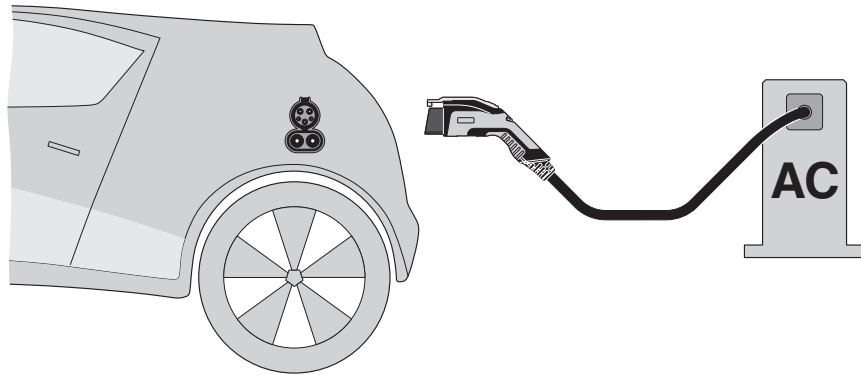

Terminology definition

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Approvals

 IECEE CB Scheme Approval ID: DE1-60844	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	250 V	32 A	-	-

 VDE Zeichengenehmigung Approval ID: 40045364	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	250 V	32 A	-	-

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Classifications

ECLASS

ECLASS-9.0	27144705
ECLASS-10.0.1	27144705
ECLASS-11.0	27144705

ETIM

ETIM 8.0	EC002897
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 10;
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

AC charging cable - EV-T1G3K-1AC32A-5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Accessories

Charging connector holder

Charging connector holder - EV-T1AC-PARK - 1624139

<https://www.phoenixcontact.com/pc/products/1624139>




CHARX connect accessories, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), Type 1, SAE J1772, Front mounting, D-Line, C-Line, housing: black

Label

Label - EV-LABEL-B - 1309758

<https://www.phoenixcontact.com/pc/products/1309758>



CHARX connect accessories, Label, Accessories, for AC charging cable, DIN EN 17186, C-Line, PHOENIX CONTACT logo, Marking B for AC type 1 vehicle charging connectors with metric charging cable and type 1 vehicle charging inlets

AC charging cable - EV-T1G3K-1AC32A- 5,0M6,0ESBK11



1628126

<https://www.phoenixcontact.com/pc/products/1628126>

Cable gland

Cable gland - G-INS-M20-M68N-PNES-BK - 1424481

<https://www.phoenixcontact.com/pc/products/1424481>



Cable gland, material for screw connection: PA, external cable diameter 10 mm .
.. 14 mm, shielding: no, connecting thread: M20 x 1.5, color: jet black RAL 9005

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com