

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [200241112](#)
Status: **Active**
Overview: [Mega-Fit Power Connectors](#)
Description: Mega-Fit Vertical Header, Single Row, 5.70mm Pitch, 2 Circuits, 1.52µm Matte Tin Plating, UL 94V-0, Glow-Wire Capable, Black

Documents:

3D Model	Packaging Specification 2002411000-001 (PDF)
Drawing (PDF)	Test Summary 1720631000-TS-000 (PDF)
3D Model (PDF)	Datasheet (PDF)
Product Specification 1720631000-PS-000 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification 768232000-AS-000 (PDF)	

Agency Certification


CSA	152514
UL	E29179

General

Product Family	PCB Headers
Series	200241
Application	Power, Wire-to-Board
Overview	Mega-Fit Power Connectors
Product Name	Mega-Fit
Taxonomy	PCB Headers and Receptacles
UPC	191130088553

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	High Conductivity Copper
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	1.510/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.23mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.58mm, 2.36mm
Packaging Type	Tray
Pitch - Mating Interface	5.70mm
Pitch - Termination Interface	5.70mm
Plating min - Mating	1.524µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	-40° to +105°C

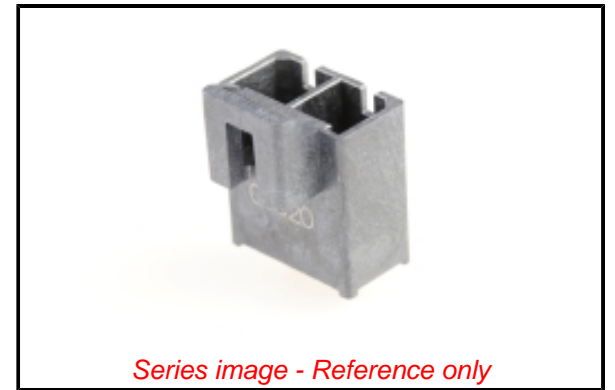

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[200241](#) Series

Mates With

Mega-Fit Receptacle Housing [200456](#)

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

26.0A

Voltage - Maximum

600V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification

768232000-AS-000

Packaging Specification

2002411000-001

Product Specification

1720631000-PS-000

Sales Drawing

2002411000-000

Test Summary

1720631000-TS-000

This document was generated on 09/02/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION