

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2028280506](#)
Status: **Active**
Overview: [Mirror Mezz Connectors](#)
Description: Mirror Mezz Hermaphroditic Connector, 2.50mm Connector Height, BGA-Attach Mounting, 6 Pair, 5 Row, 124 Circuits, 0.76µm Gold (Au) Plating

Documents:

[Drawing \(PDF\)](#) [Application Specification 2028289005PS-001 \(PDF\)](#)
[Product Specification 2028280001-000 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Application Specification 2028280001-AS-000 \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179


General

Product Family PCB Headers
 Series [202828](#)
 Application Board-to-Board
 Electrical Model No
 Overview [Mirror Mezz Connectors](#)
 Product Name Mirror Mezz
 UPC 191128862561

Physical

Breakaway No
 Circuits (Loaded) 124
 Circuits (maximum) 124
 Color - Resin Black
 Durability (mating cycles max) 100
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Capable No
 Guide to Mating Part Yes
 Keying to Mating Part None
 Lock to Mating Part No
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 1.455/g
 Number of Rows 5
 Orientation Vertical
 PCB Locator Yes
 PCB Retention Yes
 Packaging Type Embossed Tape on Reel
 Pitch - Mating Interface 1.50mm, 4.00mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded Yes
 Stackable Yes
 Temperature Range - Operating -55° to +105°C
 Termination Interface: Style Surface Mount

Electrical

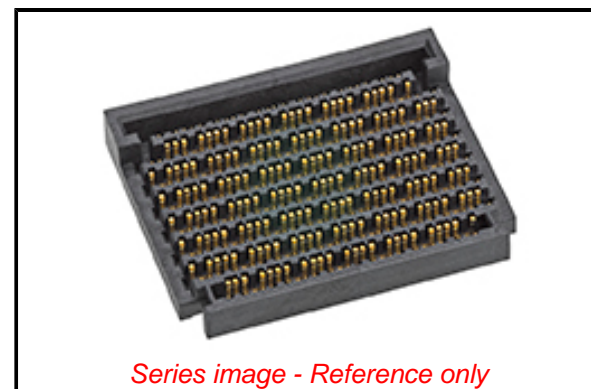

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant
REACH SVHC

Not Contained Per -
 D(2020)4578-DC (25
 June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[202828](#) Series

Mates With

[Mirror Mezzanine Hermaphroditic Connector](#)
[202828](#)

Current - Maximum per Contact	1.0A
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	020
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Application Specification	2028280001-AS-000, 2028289005PS-001
Electrical Model Document	2028281506EE-000
Product Specification	2028280001-000
Sales Drawing	2028280002-000

This document was generated on 10/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION