



AMP | AMP M Series

TE Internal #: 205043-1

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable / Cable-to-Panel, 12 Position, 11.43 mm [.45 in] Centerline, AMP M Series

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Cable, Cable-to-Panel**

Number of Positions: **12**

Centerline (Pitch): **11.43 mm [.45 in]**

**Features**

**Product Type Features**

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Cable-to-Cable, Cable-to-Panel
Sealable	No
Connector & Contact Terminates To	Wire & Cable

**Configuration Features**

Number of Positions	12
Number of Power Positions	12
Number of Signal Positions	0
Number of Rows	3

**Electrical Characteristics**

Operating Voltage	1800 VDC
-------------------	----------

**Contact Features**

Contact Current Rating (Max)	35 A
------------------------------	------



Contact Retention Within Housing	With
----------------------------------	------

Contact Type	Socket
--------------	--------

### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

### Mechanical Attachment

Panel Mount Feature	With
---------------------	------

Panel Mount Feature Type	Screw Mount
--------------------------	-------------

Connector Mounting Type	Panel Mount
-------------------------	-------------

### Housing Features

Centerline (Pitch)	11.43 mm[.45 in]
--------------------	------------------

Housing Color	Black
---------------	-------

Housing Material	Phenolic
------------------	----------

### Dimensions

Connector Height	65.91 mm[2.595 in]
------------------	--------------------

Product Width	28.19 mm[1.11 in]
---------------	-------------------

Product Length	38.1 mm[1.499 in]
----------------	-------------------

Wire Size	.05 - 2 mm <sup>2</sup>
-----------	-------------------------

Row-to-Row Spacing	9.8 mm[.386 in]
--------------------	-----------------

### Usage Conditions

Operating Temperature Range	-55 - 150 °C[-67 - 302 °F]
-----------------------------	----------------------------

### Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

### Packaging Features

Packaging Quantity	1
--------------------	---

Packaging Method	Package
------------------	---------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



Also in the Series | [AMP M Series](#)

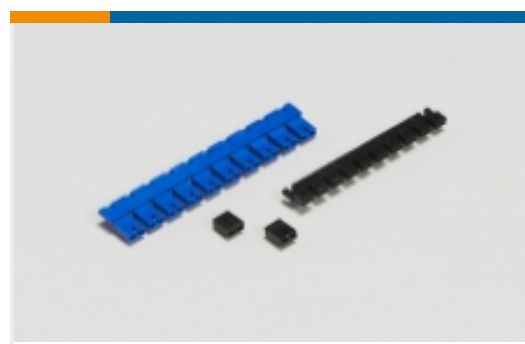

Board-to-Board Jumpers & Shunts(7)



Connector Caps & Covers(12)



Connector Hardware(18)




Connector Strain Relief(11)



Rack & Panel Connectors(1)



Rectangular Power Connectors(65)

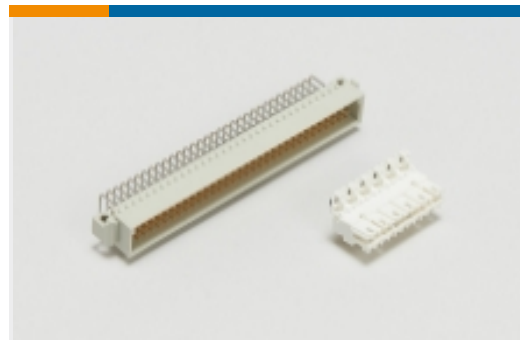

Standard Edge Connectors(1)

## Customers Also Bought



TE Part # 66360-3  
III+ SKT,18-14,15AU/FL,LP



TE Part # 7-1616941-3  
K400B3C05=CONTACTOR SPST DB  
400 AMP 28 V



TE Part # 7-2252003-3  
K500B3C02=CONTACTOR SPST NO  
500A MAGBLOW



TE Part # 203535-2  
MALE JACKSCREW ASSM.



TE Part # 1-480275-0  
12P CMNL PLUG HSG P/M NATL



TE Part # 6-203736-0  
34 UNASSM KIT,M SERIES



TE Part # 79010-18-32PN  
HERM RECP

## Documents

**Product Drawings**  
12 PL. BLOCK FEM.

English

**CAD Files**  
Customer View Model  
ENG\_CVM\_CVM\_205043-1\_J.2d\_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_205043-1\\_J.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_205043-1\\_J.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[M\\_SERIES\\_PIN\\_AND\\_SOCKET\\_CONNECTORS](#)

English

---

### Agency Approvals

[Agency Approval Document](#)

English

[Agency Approval Document](#)

English