

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [2119661114](#)  
**Status:** **Active**  
**Description:** SlimSAS Receptacle, Vertical, 4x (38 Circuits), 85 Ohm, 0.75um Gold (Au) Plating, 4.20mm Shell Tab Length, Natural

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification 2119661000-000 \(PDF\)](#)

**General**

Product Family	I/O Connectors
Series	<a href="#">211966</a>
Application	Wire-to-Board
Component Type	Receptacle
Product Name	SlimSAS
Type	N/A
UPC	193264511822

**Physical**

Circuits (Loaded)	38
Circuits (maximum)	38
Color - Resin	Natural
Durability (mating cycles max)	250
Gender	Receptacle
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.60mm
Pitch - Termination Interface	0.60mm
Plating min - Mating	0.750µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Ports	1
Termination Interface: Style	Surface Mount


**Electrical**

Current - Maximum per Contact	0.5A
Voltage - Maximum	30V AC

**Material Info**

**Reference - Drawing Numbers**

Product Specification	2119661000-000
Sales Drawing	2119661101-000

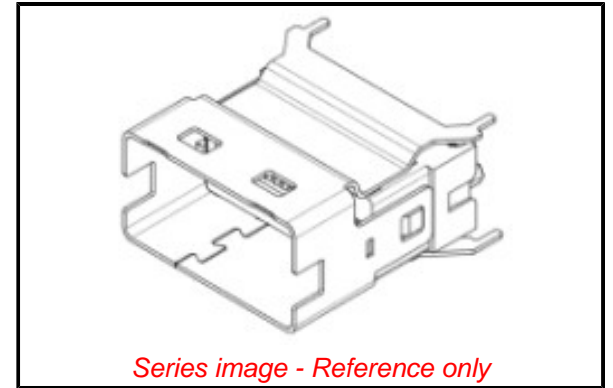

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[211966 Series](#)