

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [26-48-1061](#)  
**Status:** **Active**  
**Overview:** [KK® Interconnection System](#)  
**Description:** 3.96mm (.156") Pitch KK® Header, Breakaway, Vertical, 6 Circuits, Tin (Sn) Plating

**Documents:**

[3D Model](#) [Product Specification PS-08-50 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**General**

Product Family PCB Headers  
 Series 41661  
 Application Board-to-Board, Power, Wire-to-Board  
 Application Tooling Part Link 11-20-0901  
 MolexKits Yes  
 Overview [KK® Interconnection System](#)  
 Product Name KK®  
 UPC 800753684089

**Physical**

Breakaway Yes  
 Circuits (Loaded) 6  
 Circuits (maximum) 6  
 Color - Resin Black  
 Durability (mating cycles max) 25  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Compliant No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part None  
 Material - Metal Brass  
 Material - Plating Mating Tin  
 Material - Plating Termination Tin  
 Material - Resin Polyester  
 Net Weight 1.705/g  
 Number of Rows 1  
 Orientation Vertical  
 PC Tail Length 4.37mm  
 PCB Locator No  
 PCB Retention None  
 PCB Thickness - Recommended 1.57mm  
 Packaging Type Bag  
 Pitch - Mating Interface 3.96mm  
 Pitch - Termination Interface 3.96mm  
 Polarized to Mating Part Yes  
 Polarized to PCB No  
 Shrouded Partial  
 Stackable No  
 Temperature Range - Operating See Product Specification  
 Termination Interface: Style Through Hole

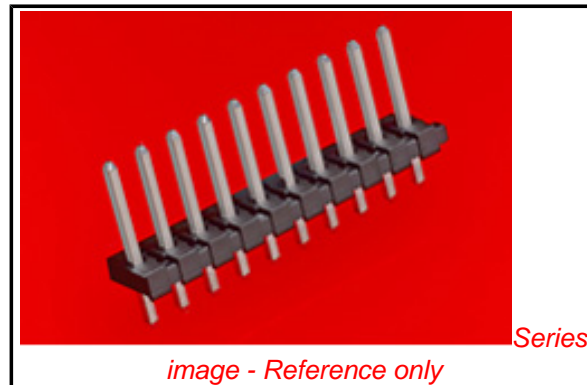


image - Reference only

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Not Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

41661Series

**Mates With**

2139 KK® Crimp Housing, 41695 KK® Crimp Housing, 6442 KK® Crimp Housing, 2145 PCB Connector, 41815 PCB Connector, 3069 KK® Crimp Housing

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 7A   |
| Voltage - Maximum             | 250V |

**Solder Process Data**

|  |                        |
|--|------------------------|
| Duration at Max. Process Temperature (seconds) | 5                      |
| Lead-free Process Capability                   | Wave Capable (TH only) |
| Max. Cycles at Max. Process Temperature        | 1                      |
| Process Temperature max. C                     | 235                    |

**Material Info**

|                 |                 |
|-----------------|-----------------|
| Old Part Number | A-41661-A06A197 |
|-----------------|-----------------|

**Reference - Drawing Numbers**

|                       |              |
|-----------------------|--------------|
| Product Specification | PS-08-50     |
| Sales Drawing         | SD-41661-001 |

This document was generated on 06/25/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**