


BEI Sensors

7230 Hollister Ave.

Goleta, CA 93117

Phone: 805-968-0782

Email: info@beisensors.com • Website: www.beisensors.com

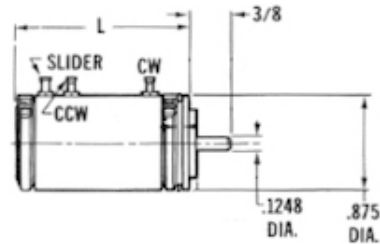Part # 3201R10KL.25, Multi Turn Rotary Potentiometer 3200-4700 Series**Multi Turn Rotary Potentiometer 3200-4700 Series**

The 3200-4700 Series rotary precision contacting potentiometer is available in wirewound or hybrid configurations. This series is available with 3, 5, or 10-turns, servo or bushing mounting options, and product diameter is offered from 0.875" to 2.0".

SPECIFICATIONS

Series Group	3200 to 4700
Series	3200
Sensor Element	Wirewound
Active Electrical Travel	3600 °
Termination Type	Solder Terminals
Mounting	Servo
Spring Return	None
Mechanical Travel	10-turn
Resistance	10.00 kΩ
Resistance Range Available	100 to 100000 Ω
Linearity	±0.25 %
Body Diameter	0.875 in
Shaft Diameter	0.125 in
Mechanical Life (Cycles)	2 million shaft revolutions
Sealing	None
Number of Outputs	1



SERVO MOUNT/BALL BEARING MODEL 3201


7/8" TO 2" DIAMETER SERVO MOUNT

WIREWOUND 3, 5 AND 10-TURN PRECISION POTENTIOMETERS

SERVO MODEL	3201
ELECTRICAL	
Actual Electrical Travel	3600° + 4° - 0°
Normal Resistance Range	100 Ω to 100K
Extended Resistance Range ⁽¹⁾	10 Ω to 250K
Resistance Tolerance: Standard %	± 3
Best Practical %	± 1
Power Rating At 70°C, Derating To 0 at 125°C (Watts)	2.5
Linearity, Independent, Tolerance, Standard %	± 0.25
Best Practical %	± 0.05
Equivalent Noise Resistance (ENR) Max. (Ohms)	100
End Voltage Max. (% Of Total Applied Voltage)	Within linearity tolerance
Insulation Resistance At 500 VDC, Min. (Megohms)	1000
Dielectric Withstanding Voltage (Volts RMS)	1000
Max. Applied Voltage (Volts DC) ⁽²⁾	1000
Temperature Coefficient Of Potentiometer, Max. %/°C	± .007
Tap Spacing Minimum	30°
MECHANICAL	
Total Mechanical Travel	3600° + 4° - 0°
Mechanical Life, Shaft Revolutions	2 million
Ganged Cups, Max. (Number)	2
Taps, Max., Excluding End Terminations	46
Moment Of Inertia, Per Cup (gm-cm ²)	0.4
Weight: Single Cup (oz.)	1.3
Each Additional Cup (oz.)	1.0
Torque, Max. Per Cup (oz.-in)	0.5
Pilot Diameter Runout, Max.	.0015
Lateral Runout, Max.	.002
Shaft Runout, Max.	.001
Shaft Radial Play, Max.	.002
Shaft End Play, Max.	.005
Dimension For Each Additional Cup	1.323 ± .002
Stop Strength Static (oz.-in)	128
ENVIRONMENTAL	
Temperature Range (°C) Standard	- 55 to + 125

(1) All specifications listed apply to units with a total resistance within the normal resistance range. Higher or lower resistances may require some degradation of listed specifications because of resistance wire composition or size.

(2) Not to exceed specified power rating.



THEORETICAL RESOLUTION—For typical coil characteristics by model number and resistance value, see Resolution Tables, page 52.
ALL MODELS are manufactured to meet or exceed applicable characteristics of MIL-R-12934. For MILITARY-APPROVED (QPL) Listings, see page 52.

TOLERANCES UNLESS OTHERWISE SPECIFIED:
FRACTIONAL: ± 1/64" DECIMAL: ± .005" ANGULAR: ± 1°

3201

LENGTHS

MODEL	NUMBER OF TURNS	LENGTH DIMENSION L
3204	3	1.070 ± .006
3504		1.388 ± .007
3704		1.231 ± .007
3207	5	1.213 ± .006
3507		1.610 ± .007
3201	10	1.570 ± .006
3501		2.165 ± .007
3701		2.008 ± .007

