

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0349852160](#)
Status: **Active**
Overview: [MX150 Sealed and Unsealed Connector System](#)
Description: MX150 Hybrid Mat-Sealed Female Connector Assembly, Dual Row, 16 Circuits, Keying Option C, with Connector Position Assurance, Dark Gray

Documents:

3D Model	Application Specification AS-33472-100-001 (PDF)
Drawing (PDF)	Application Specification AS-33472-100-CH-001 (PDF)
3D Model (PDF)	Packaging Specification PK-30907-895-001 (PDF)
Product Specification 334760000-PS-CH-000 (PDF)	Datasheet (PDF)
Product Specification PS-33476-000-001 (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Housings
Series	34985
Application	Power, Wire-to-Wire
Comments	With Connector Position Assurance (CPA)
More Detailed Tech Information	http://uscar.org/guest/teams/10/Electrical-Wiring-Component-Applications-Partnership
Overview	MX150 Sealed and Unsealed Connector System
Product Name	MX150
UPC	889056034418


Physical

Circuits (maximum)	16
Color - Resin	Gray (Dark)
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	SPS/Nylon
Net Weight	24.686/g
Number of Rows	2
Packaging Type	Partitioned Carton
Panel Mount	No
Pitch - Mating Interface	3.50mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +125°C

Material Info

Reference - Drawing Numbers

Application Specification	AS-33472-100-001, AS-33472-100-CH-001
Packaging Specification	PK-30907-895-001
Product Specification	334760000-PS-CH-000, PS-33476-000-001
Sales Drawing	SD-34985-8001-001, SD-34985-8002-001

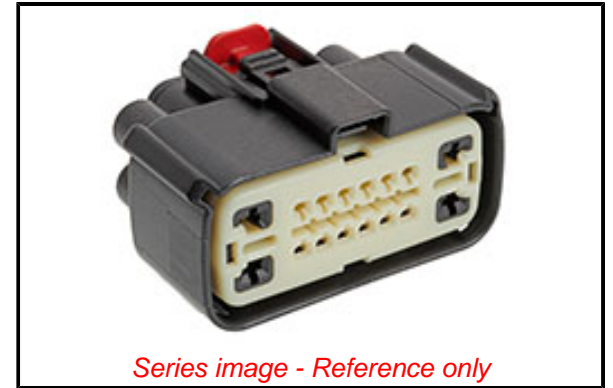

Series image - Reference only

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

Search Parts in this Series

[34985 Series](#)

Mates With

Male Dual Row Hybrid Sealed Connector
[34986](#)

Use With

MX150 Female Terminal [33012](#) , [33001](#)

Industry Standard Terminal 2.80mm