



Stecklänge / mating length




E = early mate, late break / voreilend
 S = standard
 L = late mate, early break / nacheilend

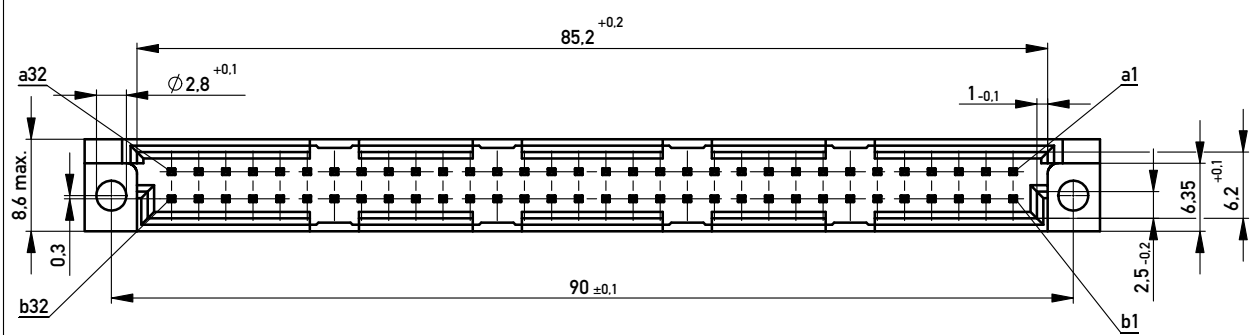


Elastische Einpresszone / compliant pressfit zone
 Isolierwerkstoff / housing material : PBT GF 30
 Bauart 4 / type 4
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 6
 diameter of drilled hole see drawing 164062 / No. 6

Bestückungsplan / contact layout

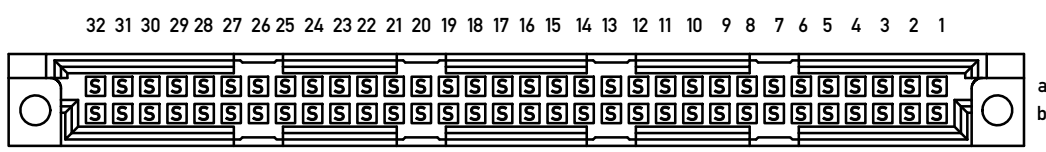

1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
 $\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

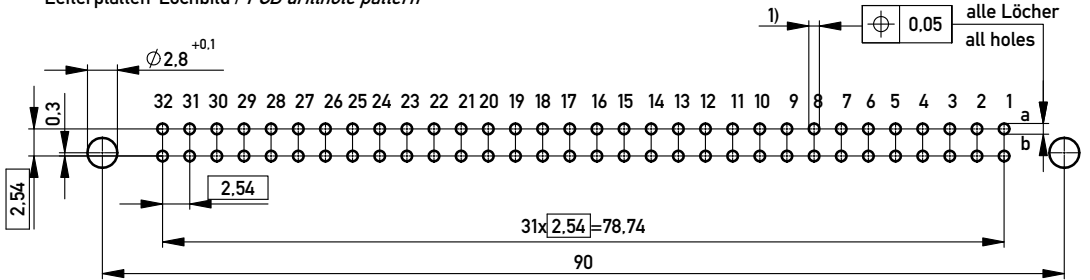

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16106 to be observed.

Information:	Tolerances	All Dimensions in mm	Scale 2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation	Messerleiste Q, 64 EE Male Connector Q, 64 Pressfit
	www.ERNI.com	364848	I A3
Index	Date 19.01.2011	Class	STVQ