

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0428202242](#)
Status: **Active**
Overview: Mini-Fit Sr. Power Connectors
Description: 10.00mm Pitch Mini-Fit Sr. Header, Single Row, Right-Angle, 6.35mm PCB Thickness, Tin (Sn) Plating, 2 Circuits, USE NYE LUBE ON MATING SURFACES
Replacement Part Number : <http://www.molex.com/molex/search/partSearch?pQuery=&sType=p&query=0428202243428202243> (Gold)

Documents:

Drawing (PDF)	Packaging Specification PK-42820-910-001 (PDF)
Product Specification PS-42815-001-001 (PDF)	Test Summary TS-42815-001 (PDF)
Product Specification TS-42815-001-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-42815-001 (PDF)	

Agency Certification

UL E29179


General

Product Family PCB Headers
 Series [42820](#)
 Application Power, Wire-to-Board
 Comments WHEN USING OVERALL TIN PLATED TERMINALS: FOR APPLICATIONS INVOLVING VIBRATION AND/OR THERMAL CYCLING, MOLEX STRONGLY RECOMMENDS THE USE OF NYE LUBRICANT (NYOGEL 7600) ON THE MATING SURFACES OF THE TERMINAL. .

Overview [Mini-Fit Sr. Power Connectors](#)
 Product Name Mini-Fit Sr.
 Replacement Part Number [428202243](#) (Gold)
 Replacement Part Number [428202244](#) (Silver)
 UPC 800754880176

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	7.437/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	8.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	6.35mm
Packaging Type	Tube

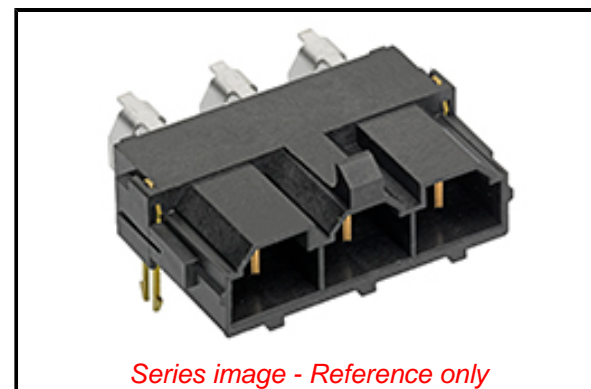

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2020)4578-DC (25 June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42820 Series](#)

Mates With

[Mini-Fit Sr. Receptacle Housing with TPA 42816](#)

Pitch - Mating Interface	10.00mm
Pitch - Termination Interface	10.00mm
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	50.0A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	030
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	235

Material Info**Reference - Drawing Numbers**

Application Specification	AS-42815-001
Packaging Specification	PK-42820-910-001
Product Specification	PS-42815-001-001, TS-42815-001-001
Sales Drawing	SDA-42820-0002-001
Test Summary	TS-42815-001

This document was generated on 09/29/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION