

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [43879-6035](#)
Status: **Active**
Overview: Mini-Fit® Compliant Pin Interface (CPI)
Description: 4.20mm Pitch Mini-Fit® CPI Header, Compliant Pin Interface, Dual Row, Vertical, 18 Circuits, Tin (Sn)over Nickel Plating, Press Fit Tail

Documents:

[Drawing \(PDF\)](#) [Test Summary TS-43879-001 \(PDF\)](#)
[Product Specification PS-43879-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	PCB Headers
Series	43879
Application	Board-to-Board, Power, Wire-to-Board
Comments	Square Pin Compliant Pin
Overview	Mini-Fit® Compliant Pin Interface (CPI)
Product Name	Mini-Fit® CPI
UPC	884982597884

Physical

Breakaway	No
Circuits (Loaded)	18
Circuits (maximum)	18
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Material - Resin	High Temperature Thermoplastic
Net Weight	8.480/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	6.35mm
PCB Locator	No
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

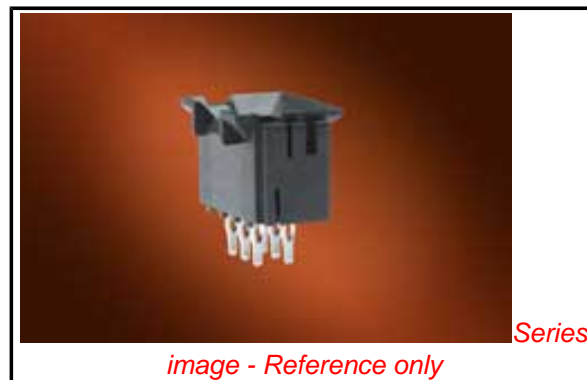

EU RoHS

ELV and RoHS Compliant

REACH SVHC Contains SVHC: No Low-Halogen Status Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[43879Series](#)

Mates With

[5557](#) Mini-Fit Jr.™ Receptacle Housing, [42385](#) Mini-Fit® BMI Receptacle Header, Mini-Fit® BMI Receptacle Housing [42474](#) , [44516](#)

Electrical

Current - Maximum per Contact

8A

Voltage - Maximum

600V AC (RMS)/DC

Material Info**Reference - Drawing Numbers**

Product Specification

PS-43879-001

Sales Drawing

SD-43879-061

Test Summary

TS-43879-001

This document was generated on 06/03/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION