

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [46207-1224](#)

**Status:** **Active**

**Overview:** [Mini-Fit® RTC](#)

**Description:** 4.20mm Pitch Mini-Fit® RTC Reflow High Temperature Compatible Header, Dual Row, Vertical, 6 Circuits, 3.18mm PCB Thickness, No PCB Pegs, LCP Housing, with Tin (Sn) Over Nickel (Ni) Plating, Glow Wire Compliant

**Documents:**

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-46207-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**


CSA LR19980  
UL E29179

**General**

Product Family	PCB Headers
Series	<a href="#">46207</a>
Application	Board-to-Board, Power, Wire-to-Board
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with <a href="#">45750</a> Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.. This Molex product is manufactured from material that has the following ratings, tested by independent agencies : . a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. . b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire. . . The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). . . If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.
Overview	<a href="#">Mini-Fit® RTC</a>
Product Name	Mini-Fit® RTC
UPC	883906252014

**Physical**

Breakaway	No
Circuits (Loaded)	24
Circuits (maximum)	24
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	Yes
Guide to Mating Part	No

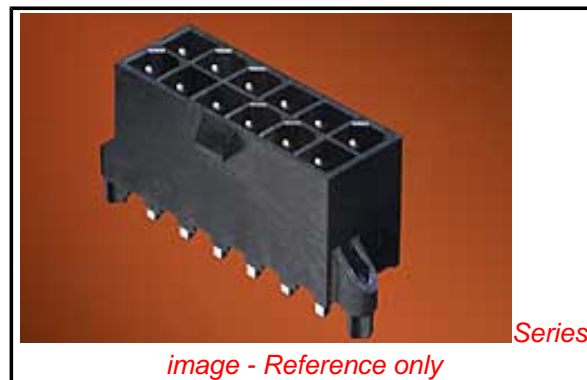

*image - Reference only*

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

**Contains SVHC: No Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[46207Series](#)

**Mates With**

[5557](#) Mini Fit Jr.™ Receptacle

Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Nickel
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	8.299/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	5.26mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	3.18mm
Packaging Type	Tray
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

### Electrical

Current - Maximum per Contact	13A
Voltage - Maximum	600V AC (RMS)/DC

### Solder Process Data

Duration at Max. Process Temperature (seconds)	30
Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	265

### Material Info

### Reference - Drawing Numbers

Product Specification	PS-46207-001
Sales Drawing	SD-46207-002

This document was generated on 06/03/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**