

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [47019-1502](#)
Status: **Active**
Overview: SIM - Smart Card
Description: 2.54mm Pitch SIM Card Connector, Block Style, 6 Circuits, Housing Height 1.50mm, Lead-Free

Documents:

[3D Model](#) [Product Specification PS-47019-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Memory Card Sockets
Series	47019
Comments	Housing Height: 1.50mm
Component Type	Header/Socket (Host)
Overview	SIM - Smart Card
Product Name	SIM
Style	Block
Type	N/A
UPC	822350147729

Physical

Card Detection Switch	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	3,000
Ejector Button	No
Ejector Button Side	N/A
Entry Angle	90° Angle (Side Entry), Vertical (Top Entry)
Keying to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	0.167/g
PCB Locator	No
PCB Mounting Side	Normal
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	0.051µm
Ports	1
Temperature Range - Operating	-30°C to +85°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	0.5A
Shielded	No
Voltage - Maximum	15V DC
Voltage Key	N/A

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
--	----

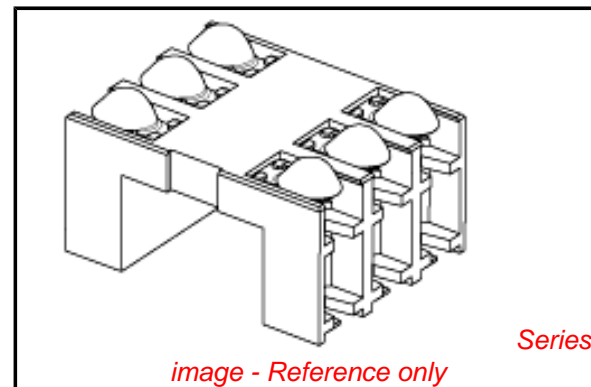


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

**Contains SVHC: No
Low-Halogen Status
Low-Halogen**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

47019Series

Mates With

Standard SIM Card

Use With

SIM Card

Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	250

Material Info

Reference - Drawing Numbers

Product Specification	PS-47019-001
Sales Drawing	SD-47019-002

This document was generated on 12/19/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION