

Data & Signal, Plug, 7.5 mm, 4-pole, solder terminal, insulated, brown



Description

- Solder terminal:
for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 4-pole, insulated, straight


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

| | | | |
|-----------------------|---------------------|---------------------------|------------------|
| Diameter | 7.5 mm | Allowable Operation Temp. | -20 °C to 70 °C |
| Number of Poles | 4-pole | Terminal | solder terminal |
| Ratings DC | 2 A / 12VDC | Housing | insulated |
| Ratings AC | 2 A / 12 VAC | Style | straight |
| Dielectric Strength | 1000VDC | Lifetime | 50000 Insertions |
| Insulation Resistance | > 10000 MΩ @ 500VDC | | |

Dimensions

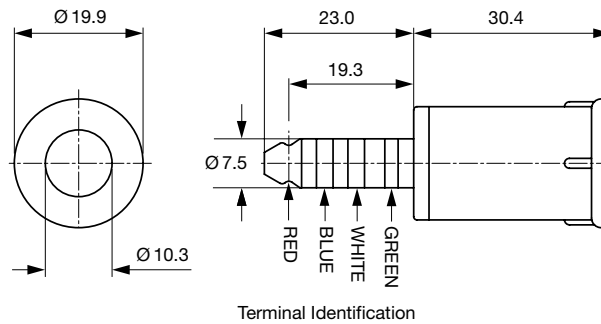

All Variants

| Product group | Diameter [mm] | Number of Poles | Terminal | Order Number |
|----------------------------------|---------------|-----------------|-----------------|---------------------------|
| Data and Signal Plug/ Sockets | 7.5 | 4-pole | solder terminal | 4804.1401 |

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Accessories

Description



4804.0002
Sleeve brown, 5.6 mm



4804.0053
Sleeve brown, 4.8 mm



4804.0054
Sleeve brown, 4.2 mm

Mating Outlets/Connectors

Category / Description



Data and Signal Plug/Socket Overview complete

| | |
|---|-----------|
| Kabeltülle PG12, Socket, solder terminal, screened, 7.5 mm, 4-pole, straight, , UK-Connector | 4804.2400 |
| Kabeltülle PG12, Socket, solder terminal, insulated, 7.5 mm, 4-pole, straight, , UK-Connector | 4804.2410 |
| Data and Signal Plug/Socket further types to 4804 UK-Stecker, D=7,5mm | |