

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5055680971](#)
Status: **Active**
Overview: [Micro-Lock Plus Wire-to-Board Connector System](#)
Description: 1.25mm Pitch, Micro-Lock Plus PCB Header, Single Row, Vertical, Surface Mount, Tin-Bismuth Plating, Positive Lock, 9 Circuits, Tape and Reel, Black

Documents:

| | |
|---|---|
| 3D Model | Product Specification 5055651002-PS-000 (PDF) |
| Drawing (PDF) | Application Specification AS-505565-001-001 (PDF) |
| 3D Model (PDF) | Packaging Specification 5055689200-200 (PDF) |
| Product Specification 5055650000-000 (PDF) | RoHS Certificate of Compliance (PDF) |
| Product Specification 5055651000-PS-000 (PDF) | Product Literature (PDF) |

Agency Certification

UL E29179

General


| | |
|----------------|--|
| Product Family | PCB Headers |
| Series | 505568 |
| Application | Signal, Wire-to-Board |
| Overview | Micro-Lock Plus Wire-to-Board Connector System |
| Product Name | Micro-Lock Plus |
| UPC | 889056556514 |

Physical

| | |
|--------------------------------|-----------------------|
| Breakaway | No |
| Circuits (Loaded) | 9 |
| Circuits (maximum) | 9 |
| Color - Resin | Black |
| Durability (mating cycles max) | 30 |
| First Mate / Last Break | No |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Tin-Bismuth |
| Material - Plating Termination | Tin-Bismuth |
| Material - Resin | Polyamide |
| Net Weight | 275.994/mg |
| Number of Rows | 1 |
| Orientation | Vertical |
| PCB Locator | No |
| PCB Retention | Yes |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface | 1.25mm |
| Pitch - Termination Interface | 1.25mm |
| Plating min - Mating | 1.000µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Surface Mount |

Electrical

Current - Maximum per Contact 1.5A

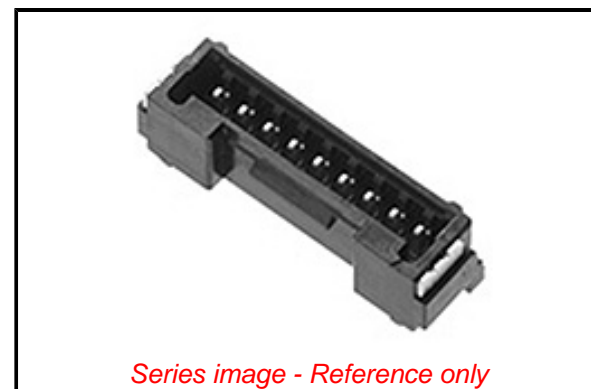

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[505568](#) Series

Mates With

[Micro-Lock Plus Receptacle Housing](#)
[505565](#)

Voltage - Maximum

50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification

AS-505565-001-001

Packaging Specification

5055689200-200

Product Specification

5055650000-000, 5055651000-PS-000, 5055651002-PS-000

Sales Drawing

5055680000-SD-000

This document was generated on 09/23/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION