

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5055750581](#)

Status: **Active**

Overview: [Micro-Lock Plus Wire-to-Board Connector System](#)

Description: 2.00mm Pitch, Micro-Lock Plus PCB Header, Single Row, Vertical, Surface Mount, Matte Tin Plating, Positive Lock, with Vacuum Pick-up Tape, 5 Circuits, Tape and Reel, Black

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[3D Model \(PDF\)](#)

[Product Specification 5055700001-PS-000 \(PDF\)](#)

[Product Specification 5055701001-PS-000 \(PDF\)](#)

[Application Specification 5055700001-A02 \(PDF\)](#)

[Application Specification 5055700001-A03 \(PDF\)](#)

[Packaging Specification 5055759200-200 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General


Product Family	PCB Headers
Series	505575
Application	Signal, Wire-to-Board
Overview	Micro-Lock Plus Wire-to-Board Connector System
Product Name	Micro-Lock Plus
UPC	889056575003

Physical

Breakaway	No
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Polyamide
Net Weight	683.180/mg
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	1.000µm
Plating min - Termination	1.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Tape
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V AC (RMS)/DC

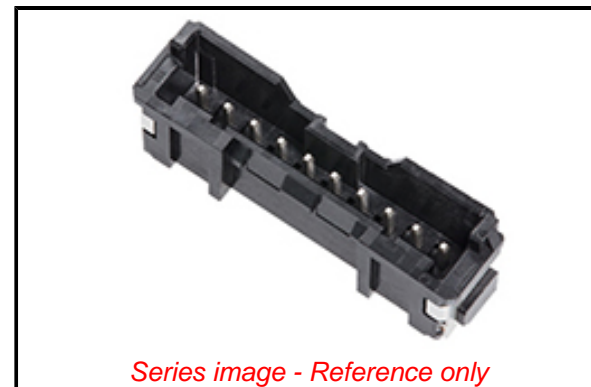

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[505575 Series](#)

Mates With

[Micro-Lock Plus Receptacle Housing
505570](#)

Material Info

Reference - Drawing Numbers

Application Specification	5055700001-A02, 5055700001-A03
Packaging Specification	5055759200-200
Product Specification	5055700001-PS-000, 5055701001-PS-000
Sales Drawing	5055750001-000

This document was generated on 09/25/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION