

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [51300-0411](#)
Status: **Active**
Overview: CRC™ (Compact Robotic Connectors)
Description: CRC™ Shielded Rectangular I/O Receptacle Housing for Female Terminal, Power, 4 Circuits, Polarization Type A, Polarization Position A-1

Documents:

3D Model	Product Specification PS-51300-005 (PDF)
Drawing (PDF)	Application Specification AS-51300-005 (PDF)
Product Specification PS-51300-004 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General


Product Family	I/O Connectors
Series	51300
Application	Panel-Mount, Wire-to-Wire
Component Type	Housing
Overview	CRC™ (Compact Robotic Connectors)
Product Name	CRC™
Type	N/A
UPC	800756548531

Physical

Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Receptacle
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Stainless Steel
Material - Plating Mating	N/A
Material - Resin	Polyester
Net Weight	3099.700/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	No
Packaging Type	Tray
Panel Mount	Front, Rear
Pitch - Mating Interface	4.80mm
Pitch - Termination Interface	4.80mm
Polarized to Mating Part	Yes
Polarized to PCB	N/A
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	N/A
Waterproof / Dustproof	No

Electrical

Current - Maximum per Contact	15A
Shielded	Yes

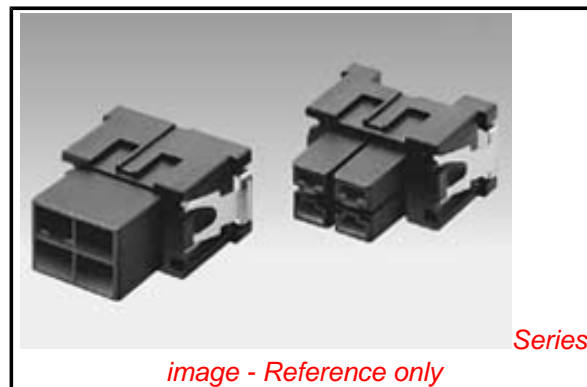

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[51300Series](#)

Mates With

[55887](#) CRC™ Shielded Rectangular I/O Plug Assembly, [55891](#) Plug Housing

Use With

CRC™ Shielded Rectangular I/O Receptacle Shell [56377](#) , CRC™ Shielded Rectangular I/O Female Terminal [56194](#) Female Terminal

Voltage - Maximum

250V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification

AS-51300-005

Product Specification

PS-51300-004, PS-51300-005

Sales Drawing

SD-51300-003

This document was generated on 11/27/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION