

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [75561-5000](#)
Status: **Active**
Overview: EXTreme PowerMass™
Description: EXTreme PowerMass™ 0.13mm Pitch, 80A Module, 2 Circuits, Right Angle Plug, Tail Length 3.07mm, without Pegs

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [75561](#)
 Application Board-to-Board, Power
 Comments 80A Module Tin Tails
 Overview EXTreme PowerMass™
 Product Name EXTreme PowerMass™
 UPC 800756716268

Physical

(p)ower-(s)ignal Configuration 2p - 0s
 Breakaway No
 Circuits (Loaded) 4
 Circuits (maximum) 4
 Durability (mating cycles max) 50
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part No
 Material - Metal Copper-Nickel-Silicon
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Net Weight 11.218/g
 Number of Rows 2
 Orientation Right Angle
 PC Tail Length 3.07mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 2.40mm
 Packaging Type Tray
 Pitch - Mating Interface 3.00mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded Closed Ends
 Stackable No
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +105°C
 Termination Interface: Style Through Hole

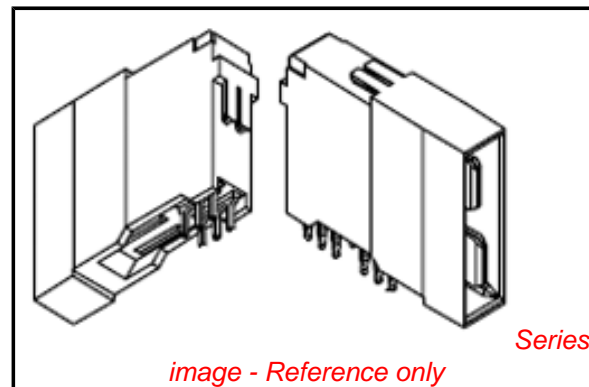


image - Reference only

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[75561Series](#)

Mates With

[755455000](#) EXTreme PowerMass™ Receptacle, [755455001](#) EXTreme PowerMass™ Receptacle

Electrical

Current - Maximum per Contact

80A

Voltage - Maximum

450V

Material Info**Reference - Drawing Numbers**

Sales Drawing

SD-75561-100

This document was generated on 10/19/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION