

WTZ4 PT100/2 C 0/4-20mA
Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Do not use product for
new developments, Only
remaining stock available



RTD temperature signal converters for connecting resistance temperature sensors and analogue DC current or voltage outputs.

A variety of resistance thermometers (e.g., PT100) are used to measure temperature in an industrial environment. These are used with 2-, 3-, or 4-wire technology.

We distinguish here between PTC and NTC thermistors. For an exact temperature measurement, the resistance value must be logged, linearised and converted into an analogue signal proportional to the temperature. Signal isolating converters carry out these important functions. They isolate signals between the harsh industrial environments and the downstream electronics. Furthermore, they compensate for potential differences caused by long cable lengths. Sensor-related inadequacies such as cold joints and linearity errors are also minimised.

General ordering data

Version	RTD transformer, PT100, 2-conductor connection, Configurable, Input : Temperature, PT100 (2- wire), Output : 0(4)-20 mA
Order No.	8432220000
Type	WTZ4 PT100/2 C 0/4-20MA
GTIN (EAN)	4032248110391
Qty.	1 pc(s).

WTZ4 PT100/2 C 0/4-20mA
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data
Dimensions and weights

Depth	112.4 mm	Depth (inches)	4.425 inch
Width	12.5 mm	Width (inches)	0.492 inch
Length	92.4 mm	Length (inches)	3.638 inch
Net weight	77.4 g		

Temperatures

Storage temperature	-20 °C...85 °C	Operating temperature	0 °C...55 °C
Operating temperature, min.	0 °C	Operating temperature, max.	55 °C

Probability of failure

SIL in compliance with IEC 61508	None
----------------------------------	------

Input

Number of inputs	1	Sensor	PT100 (2 wire)
Sensor supply	1.45 mA	Temperature input range	Adjustable from -200...+800°C

Output

Load impedance current	≤ 500 Ω	Number of outputs	1
Output current	0...20 mA, 4...20 mA		

General data

Accuracy	± 0.5 % of measuring range	Configuration	DIP switch, Potentiometer, and PT100-Simulator
Current consumption	< 48 mA @ I _{OUT} = 20 mA	Current-carrying capacity of cross-connect.	≤ 2 A
Galvanic isolation	Without isolation	Input/Output	PT100/ 0(4)...20 mA
Linearity	Yes	Rail	TS 35
Temperature coefficient	Measuring range ≥ 200 K: ≤ 200 ppm/K (typ. 80 ppm/K) 100 K ≤ measuring range < 200 K: < 250 ppm/K (typ. 100 ppm/K)	Type of connection	Tension-clamp connection
Voltage supply	24 V DC ± 20 %		

Insulation coordination

EMC standards	EN 55011, EN 61000-6	Galvanic isolation	Without isolation
---------------	----------------------	--------------------	-------------------

Connection data

Type of connection	Tension-clamp connection	Stripping length, rated connection	7 mm
Clamping range, rated connection	1.5 mm ²	Clamping range, min.	0.5 mm ²
Clamping range, max.	2.5 mm ²		

WTZ4 PT100/2 C 0/4-20mA

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC002919	ETIM 7.0	EC002919
ETIM 8.0	EC002919	ECLASS 9.0	27-21-01-29
ECLASS 9.1	27-21-01-29	ECLASS 10.0	27-21-01-29
ECLASS 11.0	27-21-01-29	ECLASS 12.0	27-21-01-29

Tender specification sheets

Long specification

PT100 temperature measuring transformer, configured with DIP switches, 2-wire connection technology

RTD measurement
isolating transformer
in 12.5 mm width with
external power supply,
for transmitting PT100- 2-
wire signals.
Input temperature range
-200...+800 °C.
Analogue DC signals (0(4)
to 20 mA) are available on
the output side.
Zero/span compensation
with potentiometer.
Add-on housing for TS35
rail mounting
Dimensions: L/W/H 92.4/
12.5/ 112.4 mm
Tension-clamp
connection / Nominal
cross-section 1.5 mm²
Protection degree: IP 20
Input PT100, 2-wire Output
0/4...20 mA Load
resistance Transmission
error typ. 200 ppm / °C
Auxiliary power 24
VDC +/- 20 % Ambient
temperature range 0°C...
+55 °C
Isolation no electrical
isolation Approvals cULus,
CSA

Type **WTZ4 PT100/2 C
0/4-20mA**

Short specification

PT100 temperature measuring transformer, configured with DIP switches, 2-wire connection technology

RTD measurement
isolating transformer
in 12.5 mm width with
external power supply, for
transmitting
PT100 2-wire signals.
Input temperature range
-200...+800 °C.
Analogue DC signals (0(4)
to 20 mA) are available on
the output side.
Zero/span compensation
with potentiometer.

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	c2a21576-d875-4548-ae68-5e7f85ddf0c7

Important note

Product information	This product will soon be replaced by a new product. Please do not use with new systems. Please contact our technical support.
---------------------	-----------------------------------------------------------------------------------------------------------------------------------

Creation date January 27, 2023 11:08:25 AM CET

Catalogue status 24.01.2023 / We reserve the right to make technical changes.

Data sheet

WTZ4 PT100/2 C 0/4-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E141197

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	WSCAD
Product Change Notification	20220218 Technical change - WAVE series' signal conditioners WS WZ
User Documentation	Instruction sheet
Catalogues	Catalogues in PDF-format
Brochures	


WTZ4 PT100/2 C 0/4-20mA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

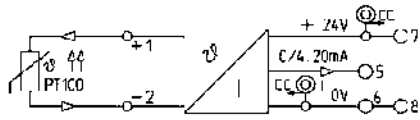

Similar to illustration

