


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0878341219](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Header, Dual Row, Low Profile, Vertical, Shrouded, 12 Circuits, 0.13µm Gold (Au) Plating, Black, without PCB Locator, without End Window, Center Polarization Slot, Lead-Free

Documents:

3D Model	Application Specification 713080001-AS-000 (PDF)
Drawing (PDF)	Packaging Specification PK-87835-001 (PDF)
Product Specification PS-70246-100-001 (PDF)	RoHS Certificate of Compliance (PDF)

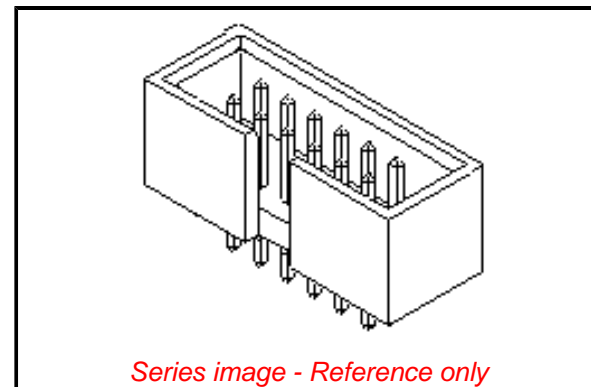

Series image - Reference only

Agency Certification

UL E29179

General

Product Family	PCB Headers
Series	87834
Application	Signal, Wire-to-Board
Overview	C-Grid Connector Products
Product Name	C-Grid
UPC	883906420390

Physical

Breakaway	No
Circuits (Loaded)	12
Circuits (maximum)	12
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	1.842/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.43mm
PCB Locator	No
PCB Retention	None
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.127µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Center Slot
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-55° to +120°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact 2.5A

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[87834 Series](#)

Mates With

1.27mm Pitch Ribbon Cable Connectors

Voltage - Maximum 250V DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 003
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 235

Material Info

Reference - Drawing Numbers

Application Specification 713080001-AS-000
Packaging Specification PK-87835-001
Product Specification PS-70246-100-001
Sales Drawing SD-87834-024-001, SD-87834-025

This document was generated on 07/31/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION