

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [87839-0039](#)
Status: **Active**
Description: 1.27mm Signal Pitch, 0.80mm SCSI Pitch, 1.27mm Power Pitch SAS Receptacle, Vertical, Hybrid, with Beveled Metal Pin, 2.36mm PCB Thickness, Embossed Tape Packaging, with Cap, 29 Circuits, Lead-Free

Documents:

[3D Model](#) [Product Specification PS-87839-041 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family I/O Connectors
 Series [87839](#)
 Application Board-to-Board
 Comments With pick and place cap
 Component Type Receptacle
 Product Name SAS
 Type N/A
 UPC 756054932322

Physical

Boot Color N/A
 Circuits (Loaded) 29
 Circuits (maximum) 29
 Circuits Detail Signal 7, SCSI 7, Power 15
 Color - Resin Black
 Durability (mating cycles max) 500
 Flammability 94V-0
 Gender Female
 Keying to Mating Part Yes
 Lock to Mating Part None
 Material - Metal Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 2.177/g
 Number of Rows 2
 Orientation Vertical
 PC Tail Length 2.11mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 2.36mm
 Packaging Type Embossed Tape on Reel
 Panel Mount Yes
 Pitch - Mating Interface 0.80mm, 1.27mm
 Pitch - Termination Interface 0.80mm, 1.27mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating 0°C to +55°C

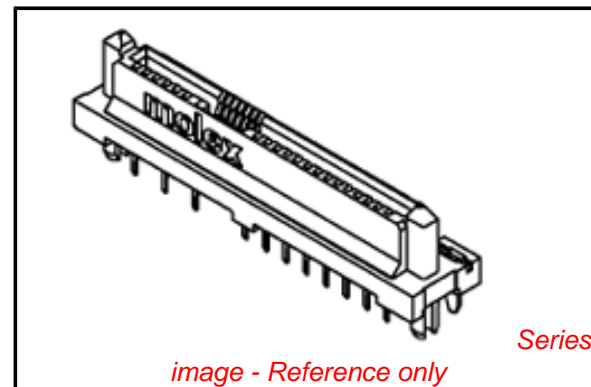

EU RoHS

**ELV and RoHS
 Compliant**
REACH SVHC
 Not Reviewed
Low-Halogen Status
Not Low-Halogen

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[87839Series](#)

Mates With

Device Plugs 87679 , 87799 , 87703. , SFF 8482 Hard Disk Drive and Backplane Plug

Termination Interface: Style	Surface Mount, Through Hole
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Electrical Model Document	EE-87839-001, EE-87839-002
Product Specification	PS-87839-041
Sales Drawing	SD-87839-040

This document was generated on 01/21/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION