

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0901522108**  
**Status:** **Active**  
**Overview:** C-Grid Connector Products  
**Description:** 2.54mm Pitch C-Grid III PC Board Connector, Dual Row, Right-Angle, Straight PCB Pins 1.00µm Tin (Sn), 8 Circuits

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification 901190001-AS-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-90152-001 (PDF)</a>
<a href="#">Product Specification PS-99020-0001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA LR19980

**General**


Product Family	PCB Receptacles
Series	90152
Application	Board-to-Board, Signal
Overview	C-Grid Connector Products
Product Name	C-Grid III
UPC	800753674943

**Physical**

Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.882/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +125°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	3.0A
Grounding to PCB	No

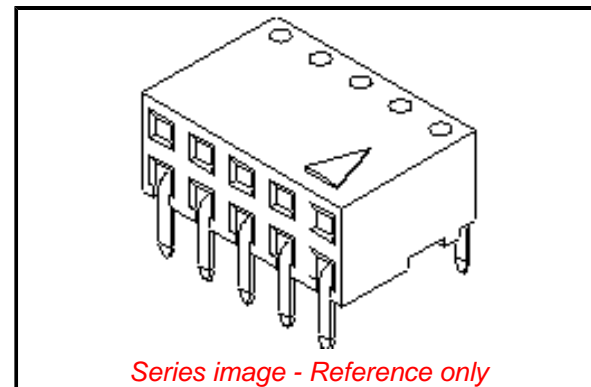

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ED/71/2019 (16 July  
2019)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

90152 Series

**Mates With**

90122 , 90131

Voltage - Maximum 350V AC/DC

**Solder Process Data**

Lead-free Process Capability WAVE

**Material Info**

**Reference - Drawing Numbers**

Application Specification 901190001-AS-000  
Packaging Specification PK-90152-001  
Product Specification PS-99020-0001-001  
Sales Drawing SDA-90152

This document was generated on 05/22/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**