


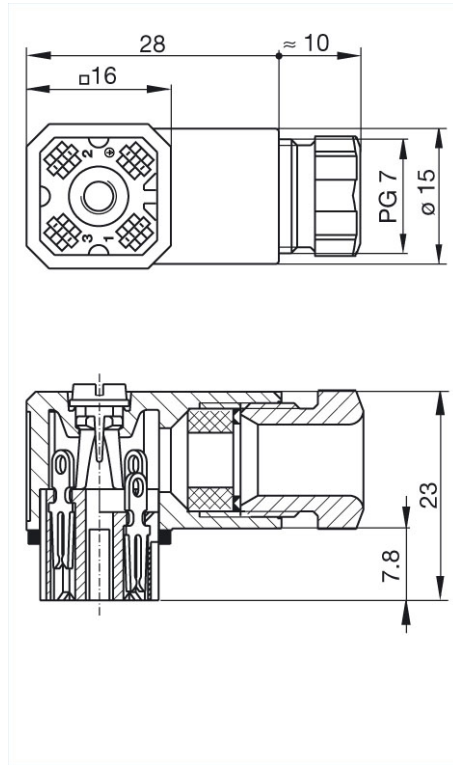


## Product information G 30 W 3 F grau/grey

Industrial Connecting Solutions:Rectangular Connectors:DIN VDE 0627 / IEC 61984 Connectors (G serie):Cable socket:G 30 W 3 F grau/grey

|  |   |
|--|---|
| Name                                     | G 30 W 3 F grau/grey  |
|  |                          |
|  | Cable socket with PG 7 cable gland and solder contacts  |
| <b>Delivery informations</b>             |   |
| Availability                             | available   |
| <b>Product description</b>               |   |
| Description                              | Cable socket with PG 7 cable gland and solder contacts  |
| Type                                     | G 30 W 3 F grau/grey  |
| Order No.                                | 932 186-106   |
| Type of contact                          | forked spring   |
| Number of contacts                       | 3 + PE  |
| Cable gland                              | PG 7  |
| Conductor size                           | max. 0.5 mm <sup>2</sup>  |
| Standard                                 | DIN VDE 0627 / IEC 61984  |
| Housing Color                            | grey  |
| <b>Technical data</b>                    |   |
| Rated voltage                            | AC/DC 250 V   |
| Rated current                            | 6 A   |
| Contact resistance                       | <= 4 mOhm   |
| Type of termination                      | solder  |
| Suitable cables                          | 4 mm to 7.5 mm  |
| <b>Material</b>                          |   |
| Contact surface material                 | Sn  |
| Contact bearer material                  | PA  |
| Housing material                         | PA  |
| <b>Environmental conditions</b>          |   |
| Protection class (IEC 60529)             | IP 65   |
| Pollution severity                       | 3   |
| Temperature range                        | -40 °C to +90 °C  |
| <b>Inflammability class</b>              |   |
| Housing                                  | 94 HB   |
| Contact bearer                           | 94 HB   |
| <b>Approvals</b>                         |   |
| VDE                                      | VDE   |
| <b>Packaging unit</b>                    |   |
| Packaging unit                           | 100 pieces  |
| <b>Scope of delivery and accessories</b> |   |
| Scope of delivery                        | 1 cable socket with PG 7 cable gland, 1 central screw M 3 x 20, 1 gasket, not assembled, in polythene bag |
| Accessories to order separately          | can be plugged into G 30 E 3 M, G 30 A 3 M grau/grey  |

Picture  
Drawing



The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.