



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 125 °C

Expanded Inside Diameter (Min): 10.8 mm [.425 in]

Recovered Inside Diameter (Max): 4.5 mm [.177 in]

Pre-Installed Lead: No

Resistance Properties: **Splash Protection**

Features

Product Type Features

Temperature Indicator	No
-----------------------	----

Configuration Features

Pre-Installed Lead	No
--------------------	----

Dimensions

Shield Outside Diameter (Min)	7.1 mm [.28 in]
Compatible Jacket Diameter Range	10.7 mm [.42 in]
Product Length	35.5 mm [1.4 in]
Expanded Inside Diameter (Min)	10.8 mm [.425 in]
Recovered Inside Diameter (Max)	4.5 mm [.177 in]

Usage Conditions

Operating Temperature (Max)	125 °C
Resistance Properties	Splash Protection
Wire Temperature (Max)	85 °C

Industry Standards

MIL/NAS Specification (MIL-S-83519, NAS-1747)	No
Government Qualified	No

Product Compliance



[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Cd (18% in Solder) Pb (32% in Solder)</p> <p>Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG8162-000
 HL1920E-230V-EURO

Also in the Series | **RAYCHEM CWT**

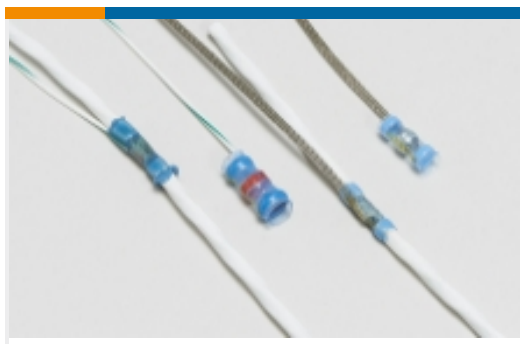

SolderSleeve Shield Terminators(24)

Customers Also Bought



TE Part #1811902-7
PLUG,N KEY,SZ 19,FREE HANGING



TE Part #5674734006
ATUM-19/6-X-SP



TE Part #158357-000
CWT-11-S



TE Part #D369-R66-AS0
369 6 WAY REC, NO CONTACTS, SKT



TE Part #4611264003
ZHTM-24/12-0-SP




TE Part #F97343-000
HX-SCE-2.5K-4.8-50-S1-4



TE Part #1618474004
HCTE-0625-0-SP



TE Part #272423-000
CWT-9



TE Part #C829553001
VG-95218-T021-C004



TE Part #176819-000
B-150-11

Documents

Product Drawings

[CWT-11](#)

English

Datasheets & Catalog Pages

[1654025_Sec8_B-155_CWT_D-110_D-1744](#)

English

Product Specifications



[SolderSleeve One-Step Wire and Cable Terminators Installation Procedures for CWT and B-155 Products](#)

English

[Product Specification](#)

English