

Product Catalog > [Diodes](#) > [Bridge Rectifiers](#) >

Part Number	GBJ1004
product family	BRIDGE RECTIFIERS
package type	GBJ
VRM(PRV)	400V
Ifsm	170A
IF(AV)	10A
@Vf	1.05V
@If	5.0A
Trr	
IR	10μA
@VR	400V
Package Qty	Tube : 15pcs/Tube, 750pcs/Box, 1.5K/Ctn;
<p>This product is listed under the following categories where you may find similar products:</p> <p>Diodes</p> <p>Bridge Rectifiers</p>	



Micro Commercial Components

GBJ10005 THRU GBJ1010

10 Amp Glass Passivated Bridge Rectifier 50 to 1000 Volts

Features

- Case Material: Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1
- Low forward voltage drop, high current capability.
- Ideal for printed circuit board
- Lead Free Finish/RoHS Compliant (NOTE 1) ("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings


- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
GBJ10005	---	50V	35V	50V
GBJ1001	---	100V	70V	100V
GBJ1002	---	200V	140V	200V
GBJ1004	---	400V	280V	400V
GBJ1006	---	600V	420V	600V
GBJ1008	---	800V	560V	800V
GBJ1010	---	1000V	700V	1000V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	10 A	$T_C = 110^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	170A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.05V	$I_{FM} = 5.0A$ $T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10 μA 500 μA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Typical thermal resistance	$R_{\theta JC}$	1.4°C/W	
Typical Junction Capacitance	C_J	55 pF	Measured at 1.0MHz, $V_R=4.0V$

- Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7
2. Pulse Test: Pulse Width 300usec, Duty Cycle 1%

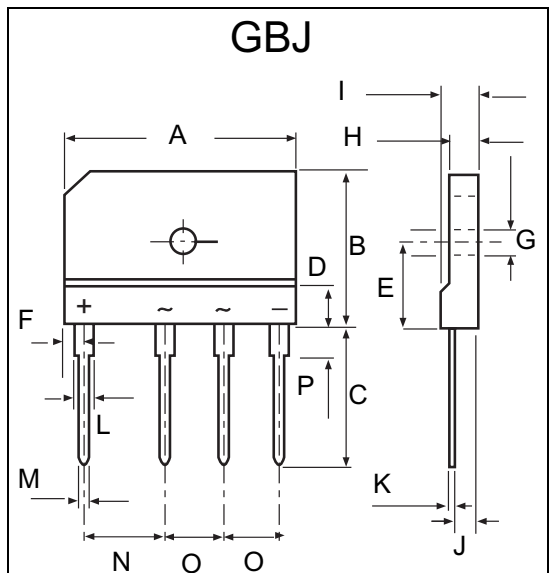

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.170	1.190	29.70	30.30	
B	.780	.800	19.70	20.30	
C	.670	.710	17.00	18.00	
D	.019	.019	4.70	4.90	
E	.430	.440	10.80	11.20	
F	.090	.110	2.30	2.70	
G	.120	.130	3.10	3.40	
H	.130	.150	3.40	3.80	
I	.170	.190	4.40	4.80	
J	.100	.110	2.50	2.90	
K	.020	.030	0.60	0.80	
L	.080	.090	2.00	2.40	
M	.040	.040	0.90	1.10	
N	.390	.400	9.80	10.20	
O	.290	.300	7.30	7.70	
P	.150	.170	3.80	4.20	





Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;15pcs/Tube

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.