



## Product designation

## Product type designation

Selector switch  
actuator key - 3  
position  
LPSS38

## General characteristics

|                          |                                   |
|--------------------------|-----------------------------------|
| Colour                   | Black                             |
| Type of positions        | 1 > 0 - 2, key<br>extraction in 2 |
| Material                 | Aluminium and<br>zinc alloy       |
| IEC degree of protection | IP66, IP67 and<br>IP69K           |

## Mechanical features

|                  |                             |         |
|------------------|-----------------------------|---------|
| Mechanical life  | cycles                      | 1000000 |
| Fixing           | Without mounting<br>adapter |         |
| Mounting adapter | LPXAU120M                   |         |

## UL technical data

|                         |                                 |
|-------------------------|---------------------------------|
| UL degree of protection | Type1, 2, 3R, 4,<br>4X, 12, 12K |
|-------------------------|---------------------------------|

## Ambient conditions

### Temperature


#### Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

#### Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

## Dimensions

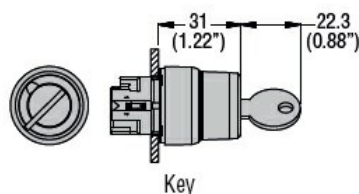

## Certifications and compliance

### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

### Certificates

cULus

## ETIM classification

### ETIM 8.0

EC002611 -  
Control switch