


Datamate J-Tek Connectors

DATAMATE J-TEK

Male Crimp Kit

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts supplied loose.
- Crimp contacts are rear insertable and replaceable.
- Spare contacts are available.

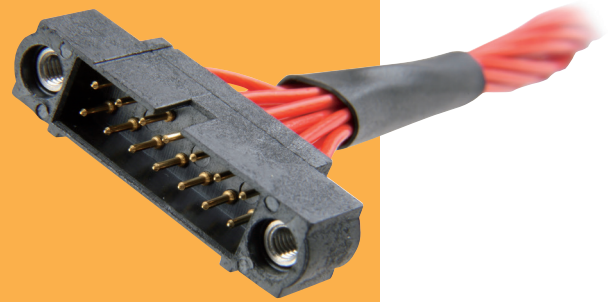

WITHOUT JACKSCREWS	WITH JACKSCREWS												
<table border="1" style="background-color: #f4a460; width: 100%;"> <thead> <tr> <th colspan="2">CALCULATION</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>$B + 12$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </tbody> </table>		CALCULATION		A	$B + 12$	B	Total no. of contacts - 2	C	$B + 7$				
CALCULATION													
A	$B + 12$												
B	Total no. of contacts - 2												
C	$B + 7$												
TOOLS	WIRE STRIPPING DETAILS												
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - Z80-193</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 													
HOW TO ORDER													
M80 - 5XX XX 05													
SERIES CODE	FINISH 05 Gold												
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td>570</td> <td>Large Bore (22 AWG), without Jackscrews</td> </tr> <tr> <td>571</td> <td>Small Bore (24-28 AWG), without Jackscrews</td> </tr> <tr> <td>560</td> <td>Large Bore (22 AWG), with Jackscrews</td> </tr> <tr> <td>561</td> <td>Small Bore (24-28 AWG), with Jackscrews</td> </tr> </tbody> </table>	TYPE		570	Large Bore (22 AWG), without Jackscrews	571	Small Bore (24-28 AWG), without Jackscrews	560	Large Bore (22 AWG), with Jackscrews	561	Small Bore (24-28 AWG), with Jackscrews	<table border="1" style="width: 100%;"> <thead> <tr> <th>TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> </tbody> </table>	TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50
TYPE													
570	Large Bore (22 AWG), without Jackscrews												
571	Small Bore (24-28 AWG), without Jackscrews												
560	Large Bore (22 AWG), with Jackscrews												
561	Small Bore (24-28 AWG), with Jackscrews												
TOTAL NO. OF CONTACTS													
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50													

All dimensions in mm.